


**STUFA ALOGENA
HALOGEN HEATER
POËLE HALOGÈNE
HALOGENHEIZGERÄT
HALOGEENKACHEL
ESTUFA HALÓGENA
AQUECEDOR HALOGÉNEO
ΘΕΡΜΑΣΤΡΑ ΑΛΟΓΟΝΟΥ
HALOGEN VARMER
HALOGENKAMIN
HALOGEN VARMER
HALOGEENILÄMMITIN
HALOGÉN FŰTŐTEST
GRZEJNIK HALOGENOWY
ГАЛОГЕННАЯ ПЕЧЬ
HALOGENNÍ KAMÍNKA
HALOGENA PEĆ
HALOGÉNOVA PIESKA
ХАЛОГЕНЕН ОТОПЛИТЕЛЕН УРЕД
SOBĂ ELECTRICĂ CU HALOGEN**

Istruzioni per l'uso
Instructions for use
Mode d'emploi
Bedienungsanleitung
Gebruiksaanwijzingen
Instrucciones para el uso
Instruções de utilização
Οδηγίες χρήσης
Brugsvejledning
Bruksanvisning
Bruksanvisning
Käyttöohjeet
Használati utasítás
Instrukcja obsługi
Инструкции по эксплуатации
Upute za uporabu
Návod k použití
Návod k obsluhu
Указания за употреба
Instrucţiuni pentru folosinţă

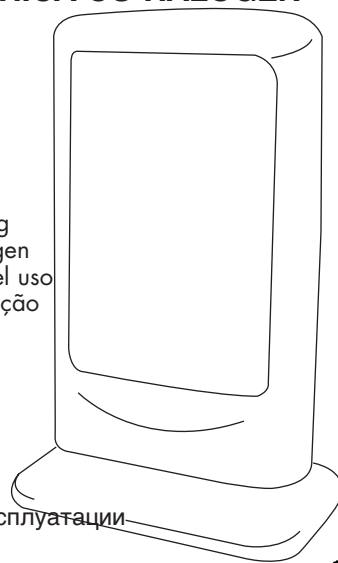

PGT
ME 10

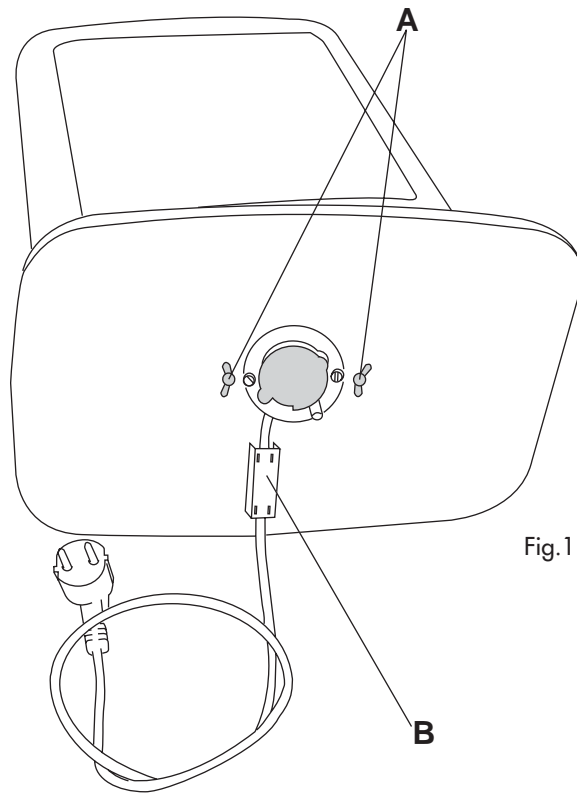


Fig.1

ELECTRICAL CONNECTION (U.K. ONLY)

A) If your appliance comes fitted with a plug, it will incorporate a 13 Amp fuse. If it does not fit your socket, the plug should be cut off from the mains lead, and an appropriate plug fitted, as below.

WARNING: Very carefully dispose of the cut off plug after removing the fuse: do not insert in a 13 Amp socket elsewhere in the house as this could cause a shock hazard.

With alternative plugs not incorporating a fuse, the circuit must be re-fitted when changing the fuse using a 13 Amp Asta approved fuse to BS 1362. In the event of losing the fuse cover, the plug must

NOT be used until a replacement fuse cover can be obtained from your nearest electrical dealer. The colour of the correct replacement fuse cover is that as marked on the base of the plug.

B) If your appliance is not fitted with a plug, please follow the instructions provided below:

The wires in the mains lead are coloured in accordance with the following code:

Blue:	Neutral
Brown:	Live

As the colours of the wires in the mains lead of this appliance may not cor-

respond with the coloured markings identifying the terminals in your plug, proceed as follows:

The wire which is coloured blue must be connected to the terminal which is marked with the letter N or coloured black.

The wire which is coloured brown must be connected to the terminal which is marked with the letter L or coloured red.