



FORNO A MICROONDE COMBINATO CON GRILL

Istruzioni per l'uso

INDICE


DESCRIZIONE	3
COME OTTENERE I MIGLIORI RISULTATI DAL VOSTRO FORNO	4
AVVERTENZE	5
DATI TECNICI	6
COLLEGAMENTO ELETTRICO	6
INSTALLAZIONE	7
POTENZA RESA	7
DESCRIZIONE ED USO DEI COMANDI	8
ACCESSORI IN DOTAZIONE	8
VASELLAME DA USARE	9
CONSIGLI PER L'UTILIZZO DELLE MICROONDE	10
USO DEI COMANDI E PROGRAMMAZIONE	11
FUNZIONE SOLO MICROONDE	12
FUNZIONE COMBINATA MICROONDE + GRILL	20
FUNZIONE SOLO GRILL	22
PROGRAMMARE PIÙ OPERAZIONI IN SEQUENZA	24
UTILIZZARE I TASTI "FUNZIONI AUTOMATICHE"	25
PROGRAMMA "RISCALDAMENTO VELOCI"	26
SICUREZZA PER BAMBINI	26
MANUTENZIONE E PULIZIA	27

Data and instruction for Performance Tests according to IEC 60705 and EN 60705 (1999-04)

The International Electrotechnical Commission SC 59H, has developed a Standard for comparative testing of heating performances of microwave ovens.

We recommend the following for this oven:

Test Nr. on standard	Item	Duration	Function	Power level	Weight	Standing time	Note
12.3.1	Egg custard	12-14	☞	5	750 gr	5 min.	The upper surface shall be evaluated after the standing time. The inner custard evaluation shall be conducted after two hours.
12.3.2	Sponge cake	4-6	☞	5	475 gr	5 min.	Use the borosilicate glass container stated in the Standard (max dia. 210 mm) or a Pyrex® glass container dia. 210 mm, height 50 mm and wall thick. 6mm.
12.3.3	Meat loaf	18-20	☞	4	900 gr	5 min.	Cover the container with cling film and pierce the film. Use the rectangular borosilicate glass container stated in the Standard or the Arcopal® Cat. nr Z1/B8 (01)10460-1
13.3	Defrosting minced meat	10-12	☞	Defrost	500 gr	15 min.	Place the frozen load directly on the turnable (G). Turn upsidedown the load after half of the defrosting time.
12.3.4	Potato gratin	20-25	<i>combi</i>	5	1100 gr	5 min.	Use the borosilicate glass container stated in the Standard (max dia. 210 mm) or a Pyrex® glass container dia. 210 mm, height 50 mm and wall thick. 6mm. Put the container directly on the turnable. Do not preheat the oven.
12.3.6	Chicken	35-40	<i>combi</i>	4	1200 gr	5 min.	The following instructions shall be strictly observed for this type of load: put the chicken in Pyrex® glass container dia. 210 mm, height 50 mm and wall thickness of 6 mm. Pour 1/2 glass of water in the container. put the container directly on the turnable. Do not use any wire rack or drip tray. Turn upsidedown the load after half of the cooking time.

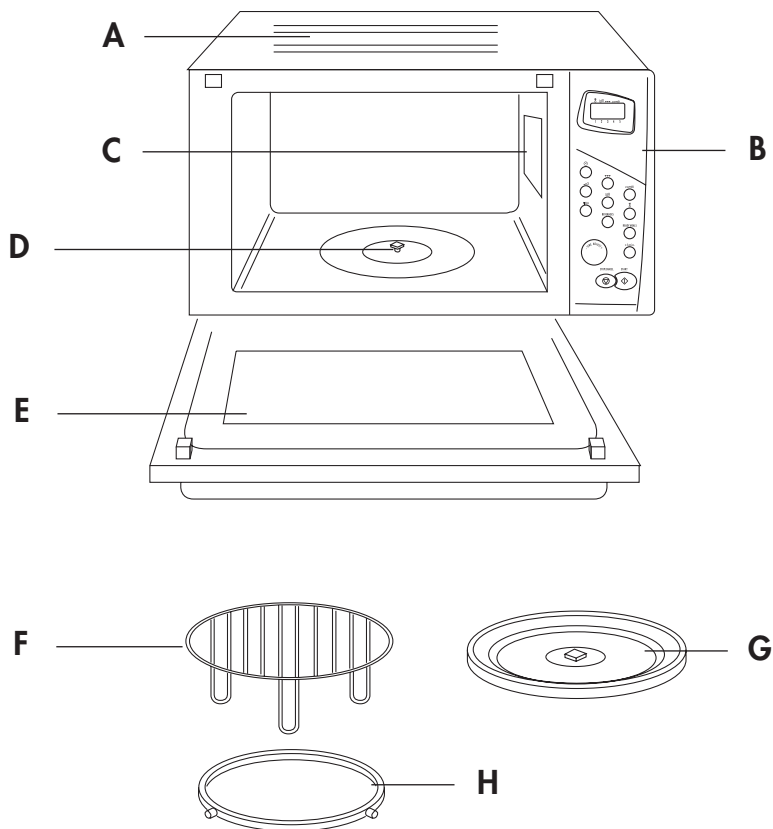

DESCRIZIONE

- A** Resistenza grill
- B** Pannello comandi
- C** Coperchio uscita microonde
- D** Perno piatto rotante
- E** Lato interno porta
- F** Griglia
- G** Piatto rotante
- H** Supporto piatto rotante