


**IRONING SYSTEM
SISTEMA STIRANTE
ΑΤΜΟΣΥΣΤΗΜΑ**

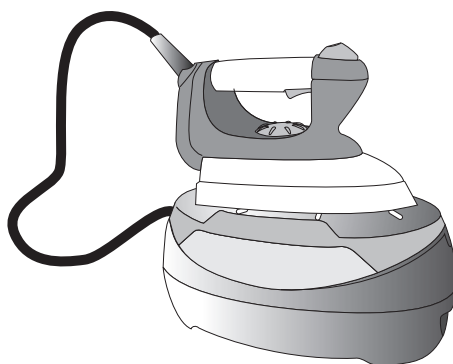

**Instructions
Istruzioni per l'uso
Οδηγίες Χρήσης**






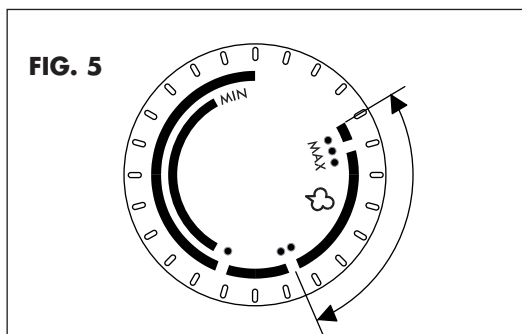


FIG. 6

	GB	I	GR
●	Acetate, acrylic, nylon, polyester, rayon	Acetato, acrilico, nylon, poliestere, rayon	Συνθετικές, Ακρυλικά, Νάιλον, Πολυέστερ, Ραιγιόν
● ●	Silk	Seta	Μεταξωτά
● ● ☼	Wool, cotto, fine linen	Lana, cotone, lino fino	Μάλλινα, βαμβακερά, λερτά, λινά
● ● ● ☼	Cotton, linen, starched, clothes	Cotone, lino, tessuti inamidati	Βαμβακερά, λινά, βρεγμένα υφάσματα

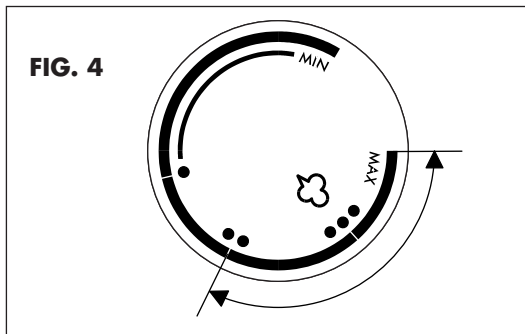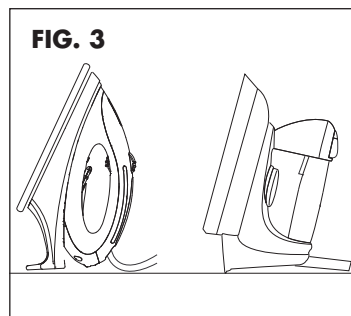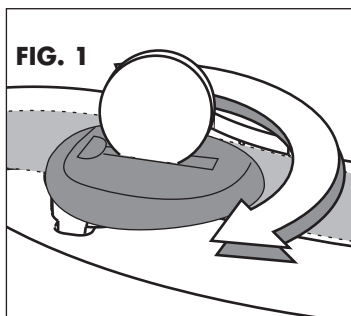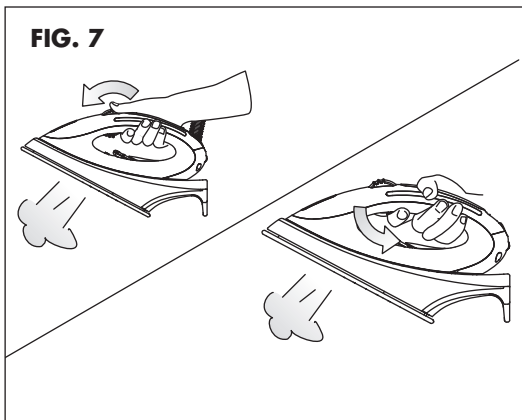

ELECTRICAL CONNECTION (UK ONLY)

- A) If your appliance comes fitted with a plug, it will incorporate a 13 Amp fuse. If it does not fit your socket, the plug should be cut off from the mains lead, and an appropriate plug fitted, as below.
WARNING: Very carefully dispose of the cut off plug after removing the fuse: do not insert in a 13 Amp socket elsewhere in the house as this could cause a shock hazard.
 With alternative plugs not incorporating a fuse, the circuit must be protected by a 15 Amp fuse.

WARNING - THIS APPLIANCE MUST BE EARTHED **IMPORTANT**

The wires in the mains lead are coloured in accordance with the following code:

Green and yellow: Earth
 Blue: Neutral
 Brown: Live



- If the plug is a moulded-on type, the fuse cover must be re-fitted when changing the fuse using a 13 Amp Asta approved fuse to BS 1362. In the event of losing the fuse cover, the plug must NOT be used until a replacement fuse cover can be obtained from your nearest electrical dealer. The colour of the correct replacement fuse cover is that as marked on the base of the plug.
- B) If your appliance is not fitted with a plug, please follow the instructions provided below:

As the colours of the wires in the mains lead may not correspond with the coloured markings identifying the terminals in your plug, proceed as follows:

The green and yellow wire must be connected to the terminal in the plug marked with the letter E or the earth symbol  or coloured green or green and yellow.
 The blue wire must be connected to the terminal marked with the letter N or coloured black.
 The brown wire must be connected to the terminal marked with the letter L or coloured red.

