

FORNO A MICROONDE

COMBINATO CON GRILL

Istruzioni per l'uso

INDICE


DESCRIZIONE	3
COME OTTENERE I MIGLIORI RISULTATI DAL VOSTRO FORNO	4
AVVERTENZE	5
DATI TECNICI	6
COLLEGAMENTO ELETTRICO	6
INSTALLAZIONE	7
POTENZA RESA	7
DESCRIZIONE ED USO DEI COMANDI	8
ACCESSORI IN DOTAZIONE	8
VASELLAME DA USARE	9
CONSIGLI PER L'UTILIZZO DELLE MICROONDE	10
USO DEI COMANDI E PROGRAMMAZIONE	11
COTTURA CONTEMPORANEA SU 2 RIPIANI	12
FUNZIONE SOLO MICROONDE	14
FUNZIONE COMBINATA MICROONDE + GRILL	22
FUNZIONE SOLO GRILL	24
PROGRAMMARE PIÙ OPERAZIONI IN SEQUENZA	26
UTILIZZARE I TASTI "FUNZIONI AUTOMATICHE"	27
PROGRAMMA "RISCALDAMENTO AUTOMATICO"	28
SICUREZZA PER I BAMBINI	28
MANUTENZIONE E PULIZIA	29

Data and instruction for Performance Tests according to IEC 705 and further Amendment Document 59H/69/CD

The International Electrotechnical Commission SC 59H, has developed a Standard for comparative testing of heating performances of microwave ovens. The draft of the new Edition of this standard has been circulated with Document 59H/69/CD, which also describes the tests marked with (*) in this table.

We recommend the following for this oven:

Test Nr. on standard	Item	Duration	Function	Power level	Weight	Standing time	Note
A	Egg custard	16'	only MW	5	750 gr	5 min.	The upper surface shall be evaluated after the standing time. The inner custard evaluation shall be conducted after two hours.
B	Sponge cake	6'	only MW	5	475 gr	5 min.	Use the borosilicate glass container stated in the Standard (max dia. 210 mm) or a Pyrex® glass container dia. 210 mm, height 50 mm and wall thick. 6mm.
C	Meat loaf	20'	only MW	4	900 gr	5 min.	Cover the container with cling film and pierce the film. Use the rectangular borosilicate glass container stated in the Standard or the Arcopal® Cat. nr Z1/B8 (01)10460-1
Defrosting	Defrosting minced meat	11'	only MW	Scongela	500 gr	15 min.	Place the frozen load directly on the turnable (G). Turn upsidedown the load after half of the defrosting time.
D (*)	Potato gratin	23'	comby Mw + grill (simult.)	5	1100 gr	5 min.	Use the borosilicate glass container stated in the Standard (max dia. 210 mm) or a Pyrex® glass container dia. 210 mm, height 50 mm and wall thick. 6mm. Put the container directly on the turnable. Do not preheat the oven.
F (*)	Poultry	40'	comby Mw + grill (simult.)	4	1200 gr	5 min.	The following instructions shall be strictly observed for this type of load: put the chicken in Pyrex® glass container dia. 210 mm, height 50 mm and wall thickness of 6 mm. Pour 1/2 glass of water in the container. put the container directly on the turnable. Do not use any wire rack or drip tray. Turn upsidedown the load after half of the cooking time.

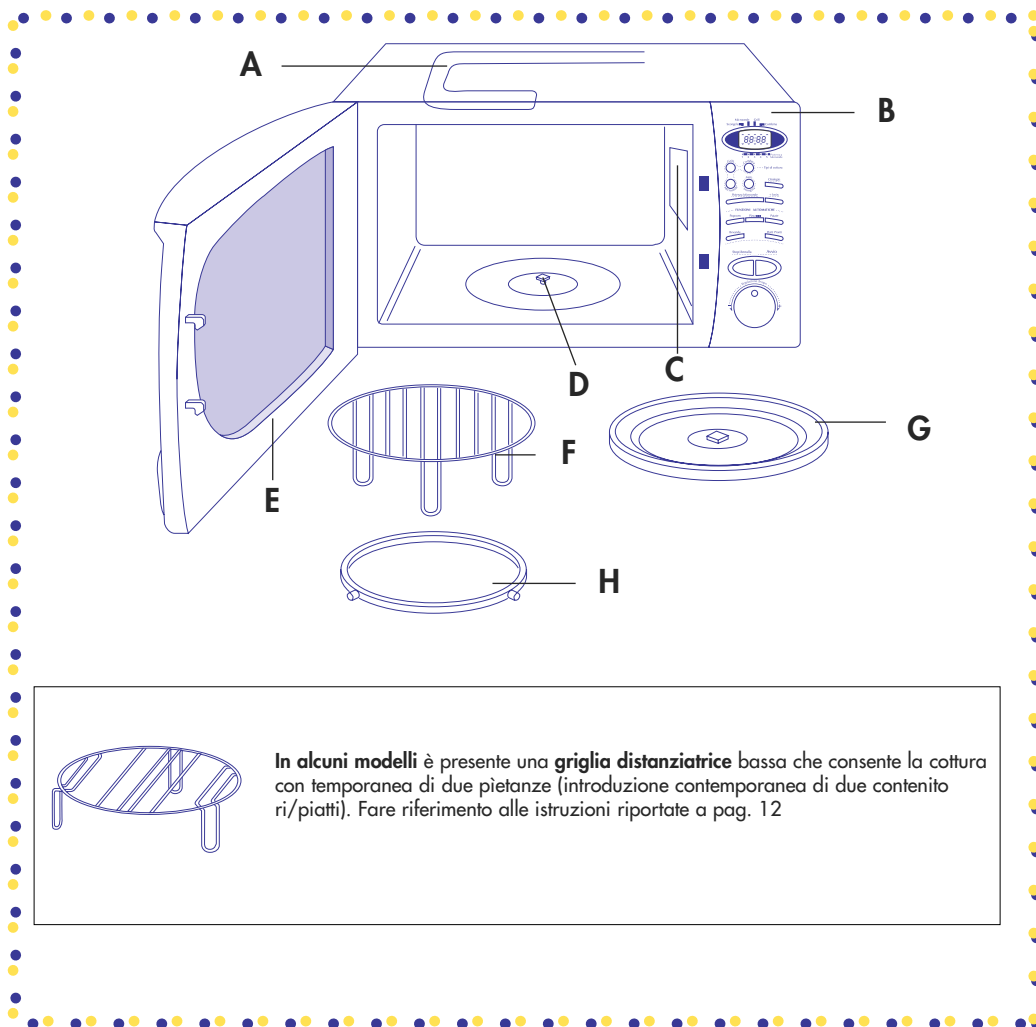

DESCRIZIONE

- | | |
|-------------------------------------|----------------------------------|
| A Resistenza grill | E Lato interno porta |
| B Pannello comandi | F Griglia |
| C Coperchio uscita microonde | G Piatto rotante |
| D Perno piatto rotante | H Supporto piatto rotante |