

Warnings

- This appliance is designed for home air conditioning and must not be used for other purposes.
- It is dangerous to modify or alter the characteristics of the appliance in any way.
- The appliance must be installed in conformity with legislation in force in the country concerned.
- If the appliance requires repair, contact a Service Centre authorised by the manufacturer only. Repairs carried out by unauthorised personnel may be dangerous.
- This air conditioning unit must be used by adults only. Never allow children to play with the appliance.
- Children or infirm persons should not be allowed to use this product unsupervised.
- Children should not be allowed to play with this appliance.
- If the power supply cable is damaged, it must be replaced by the manufacturer or its technical support service or by a person with a similar qualification in order to avoid all risks.
- Do not use extension cables.
- Before cleaning or maintenance operations, always unplug the appliance from the mains socket.
- Do not move the appliance by pulling the power cable.
- Do not install the appliance in rooms containing gas, oil or sulphur. Do not install near sources of heat.
- Do not rest heavy or hot objects on top of the appliance.
- Clean the dust filter at least once a week.
- Avoid using heating appliances near the air conditioning unit.
- Always transport the appliance upright or resting on one side, with short movements only. Before moving the appliance, empty the condensate pan in the indoor unit and the base of the outdoor unit.
After moving the appliance, wait at least 1 hour before starting it.
- The materials used for packaging can be recycled. You are therefore recommended to dispose of them in special differentiated waste collection containers.
- The refrigerant gas R407c conforms to EC regulations on the environment.
Avoid perforating the refrigerant circuit of the appliance. At the end of its working life, consign the appliance to a special collection centre.

IMPORTANT INFORMATION FOR CORRECT DISPOSAL OF THE PRODUCT IN ACCORDANCE WITH EC DIRECTIVE 2002/96/EC.



At the end of its working life, the product must not be disposed of as urban waste.

It must be taken to a special local authority differentiated waste collection centre or to a dealer providing this service.

Disposing of a household appliance separately avoids possible negative consequences for the environment and health deriving from inappropriate disposal and enables the constituent materials to be recovered to obtain significant savings in energy and resources. As a reminder of the need to dispose of household appliances separately, the product is marked with a crossed-out wheeled dustbin.

What are the Pinguino and SuperPinguino?

During the summer, you feel comfortable at a temperature of between 24 and 27°C with a relative humidity of about 50%.

An air conditioning unit removes excess moisture and heat from the room where it is located. Compared with installed models, portable air conditioning units have the advantage that they can be moved from one room to another in the home or be transported from one building to another.

Hot air from the room is passed through a coil cooled by refrigerant gas. Excess heat and moisture are removed before the air is re-emitted into the room.

In packaged models (Pinguino), a small part of this air is used to cool the refrigerant gas and then, when hot and damp, is discharged outside.

In split models (SuperPinguino), the circuit is cooled using air from the outside.

All Pinguino and SuperPinguino models can also be used in fan-only mode.

ENGLISH

DESCRIPTION OF THE APPLIANCE

- 1 Indoor unit
- 2 Indoor unit handle
- 3 Cold air outlet grille
- 4 Operating status indicator LED
- 5 Filter
- 6 Air intake grille
- 7 Power cable
- 8 Button for emptying the pan
- 9 Connection sheath
- 10 Castor wheels
- 11 Outdoor unit
- 12 Outdoor unit handle
- 13 Condenser air outlet grille
- 14 Red light (dehumidifying function)
- 15 Yellow light (fan function)
- 16 Green light (air-conditioning/dehumidifying function)
- 17 Manual operation button
- 18 Remote control receiver
- 19 Connection
- 20 Suckers
- 21 Castor locks
- 22 Protective cover
- 23 Brackets

Preparing for use

POSITIONING THE INDOOR UNIT

Install the appliance inside the room being air-conditioned. In general, near a window or door. In any case, near a perimeter wall.

The indoor unit must be positioned on an even surface, where possible on a table, or other piece of furniture (see Figures 1 and 2). There must be no obstructions to the air intake (rear grilles **6**) and outlet (top outlet grille **3**) on the indoor unit.

NOTE: The appliance must be positioned at least 20/30cm from any walls.

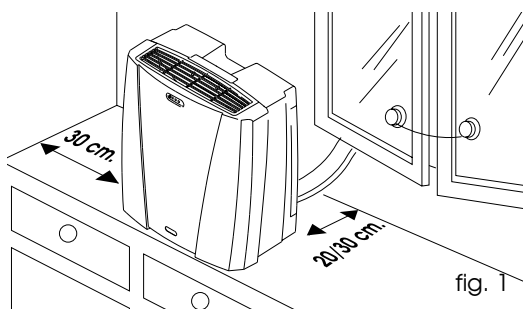


fig. 1

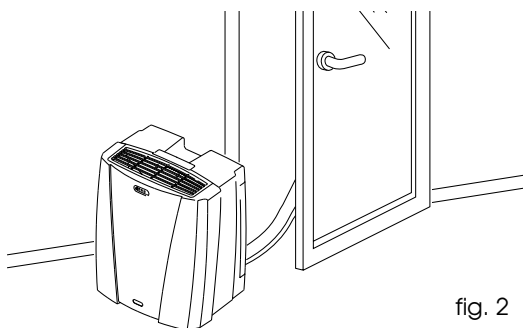


fig. 2

POSITIONING THE CONNECTION SHEATH

The sheath **9** connecting the outdoor and indoor units can be passed through the gap in a window or door left ajar; use the suckers **20** to prevent them from opening further.

The internal unit can be mounted permanently using the bracket **23** accessory (see mounting instructions provided with the bracket kit). The external unit can also be mounted permanently by purchasing the wall bracket kit from a De'Longhi service centre or dealer.


USING THE QUICK COUPLINGS

As an alternative to the methods described above, the sheath connecting the outdoor and indoor units can be passed through an approx. 6 cm diameter hole in a perimeter wall.

In this case, the outdoor unit couplings must be disconnected as follows:


- 1) Unplug the appliance from the mains supply.
- 2) Remove the protective cover by unscrewing the fixing screws.
- 3) Remove the handle by unscrewing the 4 metric screws, then, to remove the cover, unscrew the remaining 4 self-threading screws (see Figure 3).

fig. 3

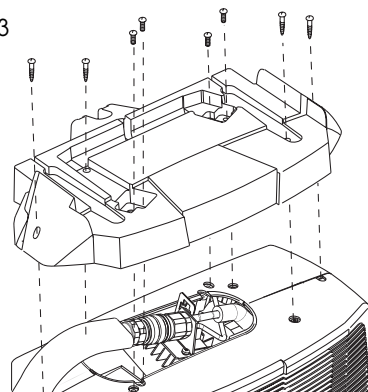

- 4) Disconnect the electrical connectors (Figure 4).
- 5) Disconnect the water tubing from the quick coupling, pressing the locking ring and pulling out the plastic tube (Figure 4).

fig. 4

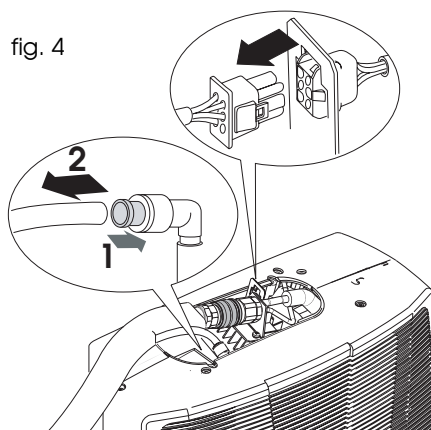

- 6) Disconnect the hoses by unscrewing the black ring nut on the quick coupling until the flexible sheath is completely detached (fig. 5).

Preparing for use

Avoid tight curves in the connection sheath.

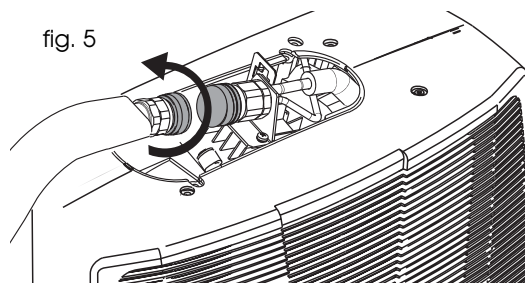


fig. 5

RECONNECTING THE SHEATH

To reconnect the ends of the connecting sheath to the indoor unit, repeat operations 1, 2, 3, 4, 5, 6 in reverse order, observing the following precautions:

- Before passing the sheath through the hole in the wall, the threaded ends of the quick couplings should be protected using the cap supplied or paper tape.
- After having connected the two refrigerant fittings, attach the electrical connectors and the water tubing, inserting it in the corresponding coupling and pushing it all the way in.

When reconnecting the quick couplings, make sure the female coupling is tightened as far as it will go until it covers the coloured reference ring. To avoid damaging the coupling, you should not use pliers or similar to disconnect or reconnect.

Warning

Have all the operations involving the disconnection and connection of the quick couplings performed outdoors.

POSITIONING THE OUTDOOR UNIT

The outdoor unit can be placed on a terrace or balcony (Fig. 6).

The outdoor unit can also be installed on a window sill, if this faces onto a balcony (Fig. 7)

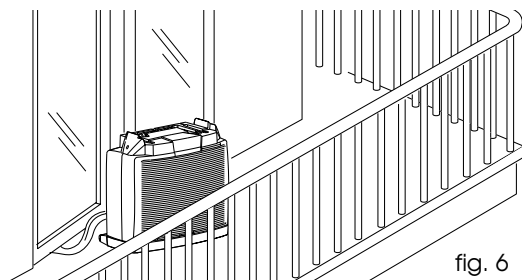


fig. 6

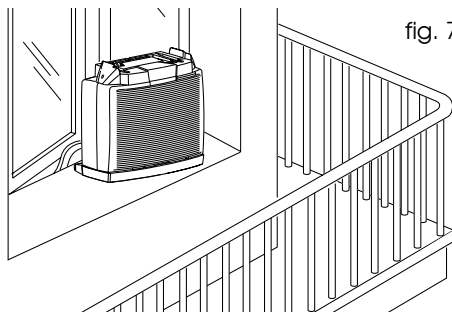


fig. 7

Always lock the 2 outer wheels using the castor locks supplied.

De'Longhi is not liable for any damage to people or things caused by the positioning of the unit in a manner not compliant with the basic standards of safety.

The outdoor unit may be installed above or at the same level as the indoor unit, provided that the difference in level is not greater than 1.5m. The air intake and outlet of the outdoor unit must be kept clear of obstacles. Leave at least 6cm between the wall and the rear of the appliance. The condensate forming during operation in air-conditioning mode (in summer) is almost totally eliminated via evaporation from the outdoor unit. In particular cases, if there is excessive humidity, the condensate is drained through a hole in the base. To drain the water that forms, use the condensate drain connector [19] supplied, which must be fitted on the base of the outdoor unit (see Figure 8). This can then be connected to a rubber hose.

Note: If appropriate, the external unit can be protected with the protective cover [22] fixing it with the screw provided. The outdoor unit should be protected from the sun, rain, snow and drips from the roof.


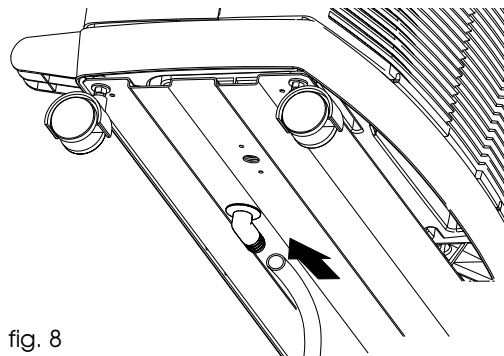


fig. 8

ENGLISH

Buttons and indicators on the indoor unit

BUTTONS AND INDICATORS ON THE INDOOR UNIT

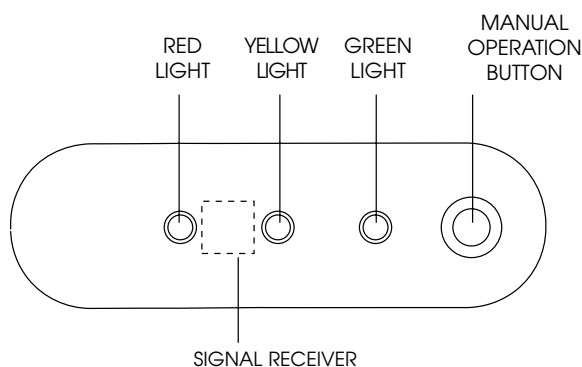

INDICATOR LIGHTS

These turn on according to the function selected or indicate any operating anomalies.

| FUNCTION | RED LIGHT | YELLOW LIGHT | GREEN LIGHT |
|------------------|-----------|--------------|-------------|
| OFF | - | - | - |
| AIR-CONDITIONING | - | - | on |
| DEHUMIDIFYING | on | - | on |
| FAN | - | on | - |

| ANOMALY | RED LIGHT | YELLOW LIGHT | GREEN LIGHT |
|---------|-----------|--------------|-------------|
| ALARM | flashing | flashing | flashing |

see "troubleshooting" on page 30

MANUAL OPERATION

This operating mode is to be used only when the remote control is inoperative (broken, lost, flat batteries). Press the manual operation button until selecting the desired function (air-conditioning, dehumidifying, fan, smart, off).

Refer to the indicator lights and the table above to identify the mode selected.

For each mode selected, the appliance will automatically choose the optimum values for maximum comfort.

This appliance is fitted with a safety system that prevents the compressor from starting until at least 3 minutes have elapsed since last started.

The remote control


REMOTE CONTROL

Inserting the batteries

- Slide the cover as shown in figure.
- Insert two new batteries (not rechargeable) making sure the (+) and (-) are in the correct positions.
- Put the cover back on.

Note: WE SUGGEST USING ALKALINE BATTERIES (LR03).


If the remote control is to be replaced or thrown away, the batteries must be removed and disposed of in accordance with the current laws as it represents an environmental hazard.



ENGLISH


PROPER USE

- Point the remote control unit towards the air-conditioning unit signal receiver.
- Maximum distance: about seven (7) metres (without any obstacle between remote control and receiver).
- The remote control must be handled with **great care**: do not drop it, expose it to direct sunlight, or leave it close to heat sources.

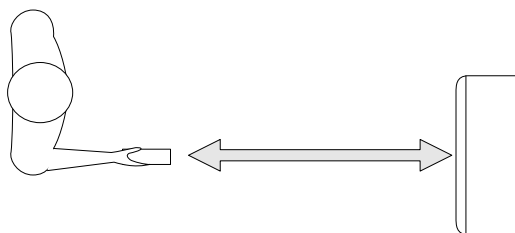

Description of the remote control

THE REMOTE CONTROL

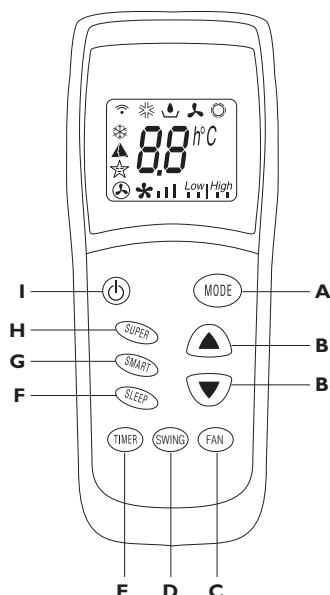

A. MODE button

Selects the operating mode (air conditioning, dehumidifying, fan).

B. ROOM TEMPERATURE buttons

Set room temperature or programme the timer.

C. FAN button

Sets fan speed to automatic, high, medium or low in sequence.

D. SWING button ((not enabled on this model))

E. TIMER button

Sets or cancels the timer.

F. SLEEP button (☆)

Sets or cancels the automatic SLEEP function.

G. SMART button (▲)

When this button is pressed, the appliance automatically establishes the most suitable operating mode for maximum comfort.

H. SUPER button (❄) (not enabled on this model)

I. ON/OFF button






Press this button to turn the appliance on and off. NB: the settings are displayed even when the air conditioner is off

DISPLAY


- 📶 Signal transmission
- ❄ Air conditioning indicator
- 💧 Dehumidifying indicator
- 🌀 Fan indicator
- ❄ SUPER indicator (not enabled on this model)
- ▲ SMART indicator
- ☆ SLEEP indicator
- 🌀 Automatic fan speed
- *||| High fan speed
- *|| Medium fan speed
- *| Low fan speed
- Low|High Regulates temperature in SMART or Dehumidifying mode.

Functions

AIR-CONDITIONING MODE






- Press the  button to turn the appliance on.
- A beep indicates that the air-conditioning unit is on and the  symbol flashes on the display
- Press the MODE button a number of times until the air-conditioning symbol  appears on the display.
- Now set the temperature using the   buttons.
- To select fan speed, press the FAN button repeatedly until the required fan speed is selected (automatic, high, medium, low).


NB: in air-conditioning mode, the appliance automatically removes excess moisture from the atmosphere.



ENGLISH




DEHUMIDIFYING MODE


- Activate this function when humidity is high.
- Press the  button to turn the appliance on. A beep indicates that the air-conditioning unit is on and the  symbol flashes on the display.
- Press the MODE button a number of times until the dehumidifying symbol  appears on the display.
- Press the  button to increase the dehumidifying level and the  button to reduce it.
- In dehumidifying mode, fan speed is selected by the appliance automatically.



FAN MODE

On humid but not particularly hot days, the fan function alone may be adequate.




- Press the  button. A beep indicates that the air-conditioning unit is on and the  symbol flashes on the display.
- Press the MODE button a number of times until the fan symbol  appears on the display.
- Once fan mode has been selected, press the FAN button until the required speed is reached (low, medium, high).





Functions


SMART MODE

In SMART mode, the air-conditioning unit decides the best way to operate to guarantee maximum comfort.

- Press the  button to turn the appliance on. A beep indicates that the air-conditioning unit is on and the  symbol flashes on the display.
- Press the SMART button. The appliance functions automatically and the  symbol appears on the display.






NB: in SMART mode, temperature is controlled automatically. However, if the required temperature has not yet been reached, it can be reduced or increased by a maximum of 2° C by pressing the   buttons.

The appliance itself will choose the best function, air-conditioning or fan only. It should be pointed out that when the automatic ventilation functions are activated, the appliance itself will choose the proper speed.



AUTOMATIC SLEEP MODE

The automatic SLEEP mode is ideal for the night-time as it enables operation of the air-conditioning unit in any of the modes (air-conditioning, dehumidifying) to be gradually reduced until it shuts down completely (after eight hours). To select SLEEP mode, proceed as follows:

- Press the  button to turn the appliance on.
- A beep indicates that the air-conditioning unit is on and the symbol  flashes on the display.
- Press the MODE button a number of times until the symbol of the function required appears on the display.
- Then select the required temperature by pressing the   buttons.
- Now press the SLEEP button to set the night function. The symbol  is displayed.

Press the SLEEP button again to go back to the previous mode. In this mode, the fan operates at low speed.



N.B: The night-time function makes it possible to keep a room at a perfect temperature, thus preventing an excessive rise or a drop in temperature while the silent operation is in effect. The air-flow will decrease, while the room temperature will vary gradually to provide the ideal condition: the temperature will increase by 1° C. after 60 minutes and by 2° C. after two hour (it goes off altogether after 8 hours).

Functions

PROGRAMMING THE TIMER


The timer can be used to delay appliance start up or shut down. This avoids wasting electricity by optimising operating periods

Programming the turn-off function

- With the air-conditioning unit on, press the TIMER button. The time is displayed and the "h" symbol flashes. Set the time when you want the appliance to go off using the ▲ ▼ buttons (from 30 minutes to 24 hours).
- Press the TIMER button again to confirm the selection. A countdown of the time left is displayed.
- At the end of the set time the appliance goes off automatically. During the first ten hours, you can select half hour intervals. For times greater than ten hours, one hour intervals can be selected.
- To cancel the set time, press the TIMER button again. You will hear a beep.

Programming the ON function

- With the air-conditioning unit off, press the TIMER button. The time is displayed and the "h" symbol flashes. Set the time when you want the appliance to come on using the ▲ ▼ buttons (from 30 minutes to 24 hours).
- Press the TIMER button again to confirm the selection.
- At the end of the set time the appliance comes on automatically. During the first ten hours, you can select half hour intervals. For times greater than ten hours, one hour intervals can be selected.
- To cancel the set time, press the TIMER button again. You will hear a beep.



ENGLISH


Tips

ELECTRICAL CONNECTIONS

Before plugging the appliance into the mains socket, check that:

- the mains power supply corresponds to the value indicated on the rating plate on the rear of the appliance;
 - the mains socket and electrical circuit are adequate for the load;
 - the mains socket matches the plug. If this is not the case, have the plug replaced;
 - the mains socket is adequately earthed.
- Failure to follow these important safety instructions absolves the manufacturer of all liability.**

- Protect the room from direct exposure to the sun by partially closing curtains and/or blinds to make the appliance much more economical to run;

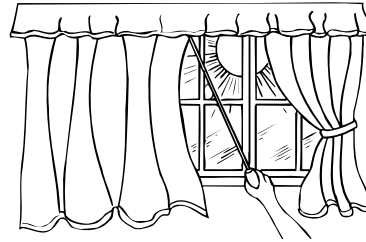


Close the curtains



Lower the blinds




Close the windows



Close the doors

- Never rest objects of any kind on the air conditioning unit;
- Never obstruct the air intake or outlet;
- Make sure there are no sources of heat in the room.



do not cover

IN THIS WAY, YOUR AIR-CONDITIONER IS READY FOR OPERATION.

Cleaning

Before cleaning or maintenance, turn the appliance off by pressing the “OFF” button on the remote control ON/OFF and always unplug the appliance from the mains socket.

CLEANING

You should clean the appliance with a slightly damp cloth then dry with a dry cloth. For safety reasons, never wash the air conditioning unit with water.

Precautions

Never use petrol, alcohol or solvents to clean the appliance. Never spray insecticide liquids or similar.

CLEANING THE AIR FILTERS

To keep your air conditioning unit working efficiently, you should:

Clean the dust filter every week

The filters are fitted on the two intake grilles on the indoor unit. The grilles house the filters.

To clean the filters, proceed as follows

Remove the dust filters from the intake grilles (Fig. 11).

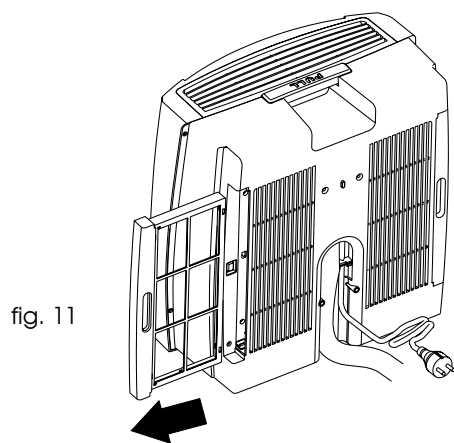


fig. 11

Use a vacuum cleaner to remove the dust collected on the dust filter.

If they are very dirty, immerse in warm water and rinse a number of times.

The water should never be hotter than 40°C.

After washing, leave the filters to dry, then replace them.

START OF SEASON CHECKS

Make sure the power cable and plug are undamaged and the earth system is efficient. Follow the installation instructions precisely.

END OF SEASON OPERATIONS

Before moving the appliance, empty the pan by holding the button **8** on the appliance until hearing the “gurgling” of the pump.

Warning: the water is drained outside from underneath the condensing unit, located outside.

Clean the dust filters and dry carefully before putting them back.

Cover the appliance with a plastic bag to stop it being covered in dust.

Troubleshooting

TROUBLESHOOTING

If something is not working, the problem may at times be simple to resolve.

Carefully check these brief instructions before contact your local Authorised Service Centre.

| PROBLEM | CAUSE | REMEDY |
|---|--|---|
| The air-conditioner doesn't work | <ul style="list-style-type: none"> no electricity it is not plugged into the mains the timer is set incorrectly | <ul style="list-style-type: none"> wait plug into the mains set the timer correctly |
| Insufficient cooling | <ul style="list-style-type: none"> air filter dirty temperature set incorrectly the air intake/outlet grilles are blocked | <ul style="list-style-type: none"> clean the air filter set the temperature correctly clean the grilles |
| Particular odour in the room | <ul style="list-style-type: none"> air filter dirty | <ul style="list-style-type: none"> clean the air filter |
| Water leaks from the indoor unit of the air-conditioner | <ul style="list-style-type: none"> incorrect installation of the appliance pump malfunction | <ul style="list-style-type: none"> See page 20 to install the appliance correctly unplug the appliance and contact the service centre |
| The remote control indicator is weak or inexistent | <ul style="list-style-type: none"> flat batteries batteries inserted the wrong way round | <ul style="list-style-type: none"> change the batteries check the polarity of the batteries (+) and (-) |
| The air conditioning unit does not operate for about three minutes after turning it on | <ul style="list-style-type: none"> the safety device has tripped | <ul style="list-style-type: none"> wait for three minutes |
| The compressor switches on and off periodically | <ul style="list-style-type: none"> the air-conditioner is working in dehumidifying mode the antifreeze safety device has tripped | |
| The three indicator lights flash | <ul style="list-style-type: none"> operating anomaly | <ul style="list-style-type: none"> unplug the appliance, wait a few minutes and then turn the appliance on again. If the problem persists, contact the service centre. |

SERVICE

If following these checks the malfunction remains, contact your nearest authorised service centre, specifying the model of the appliance and the type of defect.

Transport, filling, cleaning, recovery and disposal of refrigerant should be performed by a technical service centre appointed by the manufacturer only.

The appliance should be disposed of by a specialist centre appointed by the manufacturer only.

Warranty/technical specifications

WARRANTY AND TECHNICAL SERVICE

The conditions of the warranty and technical service are provided on the certificate supplied with your appliance.

LIMIT CONDITIONS

| | |
|-------------------------|-----------|
| Temperature in the room | 21 ÷ 32°C |
| Outside temperature | 21 ÷ 43°C |

TECHNICAL SPECIFICATIONS

| | |
|--|------------------|
| Power supply voltage | see rating plate |
| Max. power input during air conditioning | " |
| Max. power input during dehumidifying | " |
| Cooling capacity* | " |
| Number of fan speeds | 3 |
| Max. air flow-rate | 250-350 m³/h |

Dimensions of indoor unit:

| | |
|----------|--------|
| • width | 450 mm |
| • height | 475 mm |
| • depth | 255 mm |
| • weight | 10 kg |

Dimensions of outdoor unit

| | |
|----------|--------|
| • width | 570 mm |
| • height | 542 mm |
| • depth | 280 mm |
| • weight | 30 kg |

* Standard conditions:

| | |
|---------------------|-----------------------|
| Inside temperature | 27°C |
| | 47% relative humidity |
| Outside temperature | 35°C |
| | 41% relative humidity |

ENGLISH

R407c is a refrigerant that complies with the EU rules on the environment, therefore it is recommended to not perforate the unit's refrigerant circuit.
At the end of its working life, take the appliance to a special collection centre.

ELECTRICAL CONNECTION (U.K. ONLY)

- A) If your appliance comes fitted with a plug, it will incorporate a 13 Amp fuse. If it does not fit your socket, the plug should be cut off from the mains lead, and an appropriate plug fitted, as below. warning: Very carefully dispose of the cut off plug after removing the fuse: do not insert in a 13 Amp socket elsewhere in the house as this could cause a shock hazard. With alternative plugs not incorporating a fuse, the circuit must be protected by a 15 Amp fuse. If the plug is a moulded-on type, the fuse cover must be re-fitted when changing the fuse using a 13 Amp Asta approved fuse to BS 1362. In the event of losing the fuse cover, the plug must NOT be used until a replacement fuse cover can be obtained from your nearest electrical dealer. The colour of the correct replacement fuse cover is that as marked on the base of the plug.
- B) If your appliance is not fitted with a plug, please follow the instructions provided below:

WARNING - THIS APPLIANCE MUST BE EARTHED


IMPORTANT

The wires in the mains lead are coloured in accordance with the following code:

Green and yellow Earth
 Blue Neutral
 Brown Live



As the colours of the wires in the mains lead may not correspond with the coloured markings identifying the terminals in your plug, proceed as follows:

The green and yellow wire must be connected to the terminal in the plug marked with the letter E or the earth symbol  or coloured green or green and yellow.

The blue wire must be connected to the terminal marked with the letter N or coloured black.

The brown wire must be connected to the terminal marked with the letter L or coloured red.