



*We were thinking of you
when we thought of it*

MODEL RADIANT LPG GAS HEATER

OPERATING AND SAFETY INSTRUCTIONS

Important Information:

- Use in a ventilated room.
- Do not use in bedrooms, bathrooms, caravans or room sizes under 18 sq. metres.
- Always turn off at regulator and gas bottle after use and turn off before moving.
- Keep away from drapes and furniture.
- Do not leave children unsupervised when heater is in use.
- For efficiency and safety, service this heater annually.
- The appliance is not intended for use by young children or the infirm without supervision
- Young children should be supervised to ensure that they do not play with the appliance

Made in ITALY

Proudly distributed by

De'Longhi

25 CARBINE ROAD

MT WELLINGTON

PO BOX 58056


GREENMOUNT

Auckland, New Zealand

Customer Service Ph: (09) 915 7273

Fax: (09) 915 7280

e-mail:delonghi@delonghi.com.nz

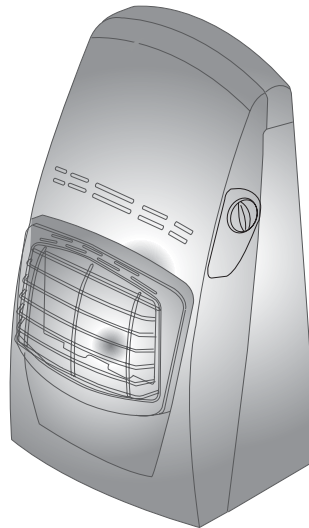

IMPORTANT
DO NOT OPERATE WITHOUT
READING INSTRUCTIONS FIRST

Spare copies of this leaflet can be obtained
from your dealer


RADIANT LPG GAS HEATER INSTRUCTIONS

ASSEMBLY

- 1) Place the gas cylinder in the gas cylinder compartment and connect the regulator to the cylinder as shown on page 3.


- 2) To fit the backcover, insert the two tabs located on the left-hand side of the backcover into the corresponding slots in the cabinet. Then insert the tab on the right hand side into its slot.

IMPORTANT: to remove the backcover, lift the backcover and pull clear of the slots.

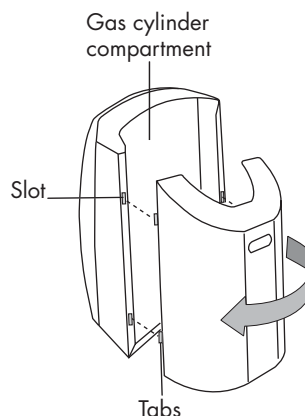

FITTING REGULATOR TO CYLINDER VALVE

The Safelok Valve and Connector have been developed for ease of use and enhanced safety. The thermal Sensitive black hand wheel connector has a quick action right hand thread for easy connection to the valve.

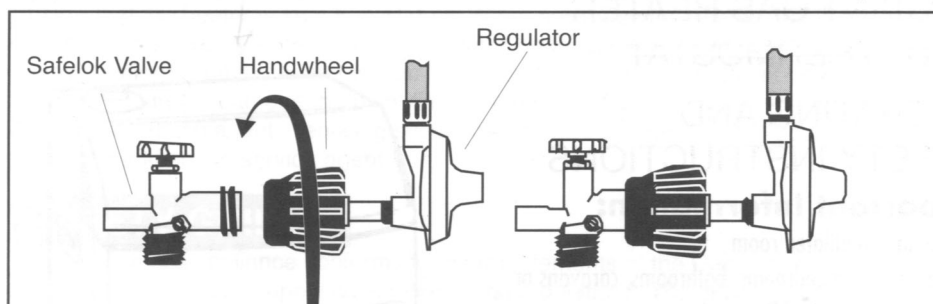

The valve on your gas cylinder should be a Safelock type and not a Clip-on, eg. Kosan type. Have your gas bottle supplier fit a Safelok valve if necessary. Once the handwheel has been firmly tightened, your heater is ready for use.

CHANGING THE GAS CYLINDER

With the heater switched OFF, turn the gas cylinder OFF, remove the back panel of the appliance and unscrew the handwheel anticlockwise. The gas cylinder can now be removed ready for refilling.

CAUTION: Never disconnect the regulator from the cylinder if the heater is operating. If you smell gas, turn off the heater and gas cylinder valve immediately, take the appliance outside and contact your service agent, retailer or gas supplier.


Safety devices

the heater you have purchased is fitted with safety devices which come on in the event of malfunctioning, while the appliance is in use. if the pilot light (placed opposite the burner) accidentally goes out, or if the room is not sufficiently ventilated, the safety device will block the gas flow, causing the heater to go off. Check the expiry date and state of the rubber tube regularly. If it is past its expiry date or has been damaged, contact our customer service centre for your nearest Authorised Delonghi Service Agent.

Avoid bending or constricting the rubber tube when the pressure regulator is connected to the gas cylinder.

OPERATING THE HEATER




Turning the gas heater on


Turn the gas on as previously described, depress the CONTROL SWITCH on top of the heater and hold down for a few seconds then turn to position  (small flame).

Check that the pilot flame has ignited and if not, repeat the operation.

When the pilot light is lit hold the Control switch down for 20-25 seconds (if released before this the centre panel and pilot light may go out).

After releasing the Control switch you can now regulate the heat by turning the switch to:

- Pos.  minimum output (1400 W)
- Pos.  maximum output (4000 W)
- Pos.  medium output (2600 W)



TURNING THE HEATER OFF

Depress the CONTROL switch and turn to the vertical position (as shown in fig.5) the centre panel will remain alight. Now turn the cylinder OFF at the valve.

REGULATORS, HOSES & CONNECTIONS

Your gas heater is fitted with an approved gas regulator and hose. Please regularly inspect them for damage or wear. Your service agent can renew any worn parts. When connecting the regulator to the cylinder or exchanging cylinders please avoid any twisting of the hose.

VENTILATION: USE ONLY IN A WELL VENTILATED ROOM


Adequate ventilation must be provided in rooms in which the heater is used. This ensures removal of the products of combustion and allows the entry of replacement air. Adequate ventilation should considerably reduce the possibility of condensation occurring. Never use in bedrooms, bathrooms or when asleep as adequate ventilation cannot be assured. Do not use in rooms smaller than, 18 sq metres. Ensure ventilation is more than 75 cm² ie. window must be open in room which heater is being operated.

MAINTENANCE


Ensure that the heater is kept free of dust. When not in use the heater should be covered and stored in a dust-free place. Stains on the exterior should be removed with a soapy solution when the heater is cold. Dry with a polishing cloth, do not use abrasive cleaners which will damage the paint finish. Refer any maintenance to your local authorised service agent. Servicing should be carried out regularly. If in doubt contact your local authorised service agent.

SAFETY GRILLE


The grille on this appliance conforms to the requirements of the gas Association of NZ and satisfies the heater appliances (fireguards) regulations. The grille, which can be hot to the touch, is to prevent risk of fire or injury from burns and no part of it should be removed. It does not give full protection for young children, the infirm or animals. Do not use with unsupervised children or infirm persons.

OPERATING GUIDE FOR YOUR SAFETY


1. Always use the heater in accordance with the instructions supplied. keep instructions in a safe place.




2. DO NOT place clothes or other materials on the Heater, as apart from the danger of fire their presence could affect the efficient working of the appliance.

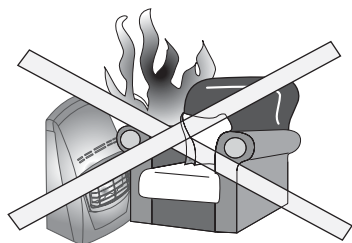

3. DO NOT position Heater close to chairs and fabrics. Keep a 75 cm GAP FROM FURNITURE.



4. DO NOT move Heater from room to room when it is lit.

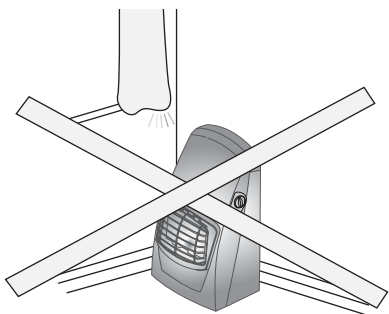

5. DO NOT position Heater alongside a wall or near curtains, etc. ALWAYS face Heater towards centre of room. Special care should be taken if the Heater is on a surface where it can move or twist on its wheels or castors if knocked by a child or dog, etc.

6. A leak is suspected, turn the gas off at the cylinder. DO NOT disconnect the regulator. Extinguish all naked lights. Contact our customer service centre for your nearest Authorised Delonghi Service Agent.

7. Do not use the appliance in the mountains at high altitudes.

8. The back panel must be fastened onto the back of the heater with the gas bottle inside the heater when in use.

