





MONTALATTE  
MILK FROTHER  
MOUSSEUR À LAIT  
MILCHAUFSCÄUMER  
MELKOPSCHUIMER  
BATIDOR DE LECHE

MONTALATTE  
ΣΥΣΚΕΥΗ ΓΙΑ ΑΦΡΟΓΑΛΟ  
MELKESKUMMER  
MJÖLKSKUMMARE  
SKUMMER

MAIDONVAANDOTIN  
МОЛОКОВЗБИВАТЕЛЬ  
СΥΤ ΚӨΠΙΡΤΚІШ

MONTALATTE  
TEJHABOSÍTÓ  
ŠLEHAČ MLÉKA  
ŠĽAHAČ MLIKA

SPIENIACZ DO MLEKA  
MONTALATTE

PENILEC ZA MLEKO  
УРЕД ЗА РАЗПЕНВАНЕ НА  
МЛЯКО

APARAT PENTRU SPUMĂ  
DE LAPTE

SÜT KÖPÜRTÜCÜ  
غلاية حليب

**IT**

page 6

**EN**

page 9

**FR**


page 12

**DE**

page 15

**NL**

page 19

**ES**

page 22

**PT**

page 25

**EL**

page 28

**NO**

page 32

**SV**

page 35

**DA**

page 38

**FI**

page 41

**RU**

page 44

**KZ**

page 48

**HU**

page 52

**CS**

page 55

**SK**

page 58

**PL**

page 561

**HR**

page 64

**SL**

page 67

**BG**

page 70

**RO**

page 74

**TR**

page 77

**AR**

الصفحة 2

## ELECTRICAL CONNECTION (UK ONLY)

Before using this appliance ensure that the voltage indicated on the product corresponds with the main voltage in your home, if you are in any doubt about your supply contact your local electricity company.

The flexible mains lead is supplied connected to a B.S. 1363 fused plug having a fuse of 13 amp capacity. Should this plug not fit the socket outlets in your home, it should be cut off and replaced with a suitable plug, following the procedure outlined below.

**Note:** Such a plug cannot be used for any other appliance and should therefore be properly disposed of and not left where children might find it and plug it into a supply socket - with the obvious consequent danger.


**N.B.** We recommend the use of good quality plugs and wall sockets that can be switched off when the machine is not in use.

**IMPORTANT:** the wires in the mains lead fitted to this appliance are coloured in accordance with the following code:

GREEN AND YELLOW  
BLUE  
BROWN

EARTH  
NEUTRAL  
LIVE

*Green and Yellow to Earth*



As the colours of the wires in the mains lead of this appliance may not correspond with the coloured markings identifying the terminals in your plug, proceed as follows:

- The wire which is coloured green and yellow must be connected to the terminal in the plug which is marked with the letter E or by the earth symbol  or coloured green or green and yellow.
- The wire which is coloured blue must be connected to the terminal which is marked with the letter N or coloured red.
- The wire which is coloured brown must be connected to the terminal which is marked with the letter L or coloured red.

When wiring the plug, ensure that all strands of wire are securely retained in each terminal. Do not forget to tighten the mains lead clamp on the plug. If your electricity supply point has only two pin socket outlets, or if you are in doubt, consult a qualified electrician.


Should the mains lead ever require replacement, it is essential that this operation be carried out by a qualified electrician and should only be replaced with a flexible cord of the same size.

After replacement of a fuse in the plug, the fuse cover must be refitted. If the fuse cover is lost, the plug must not be used until a replacement cover is obtained. The colour of the correct replacement fuse cover is that of the coloured insert in the base of the fuse recess or elsewhere on the plug. Always state this colour when ordering a replacement fuse cover.











Only 13amp replacement fuses which are approved to B.S. 1362 should be fitted.

This appliance conforms to the Norms EN 55014 regarding the suppression of radio interference.

**Warning - this appliance must be earthed**

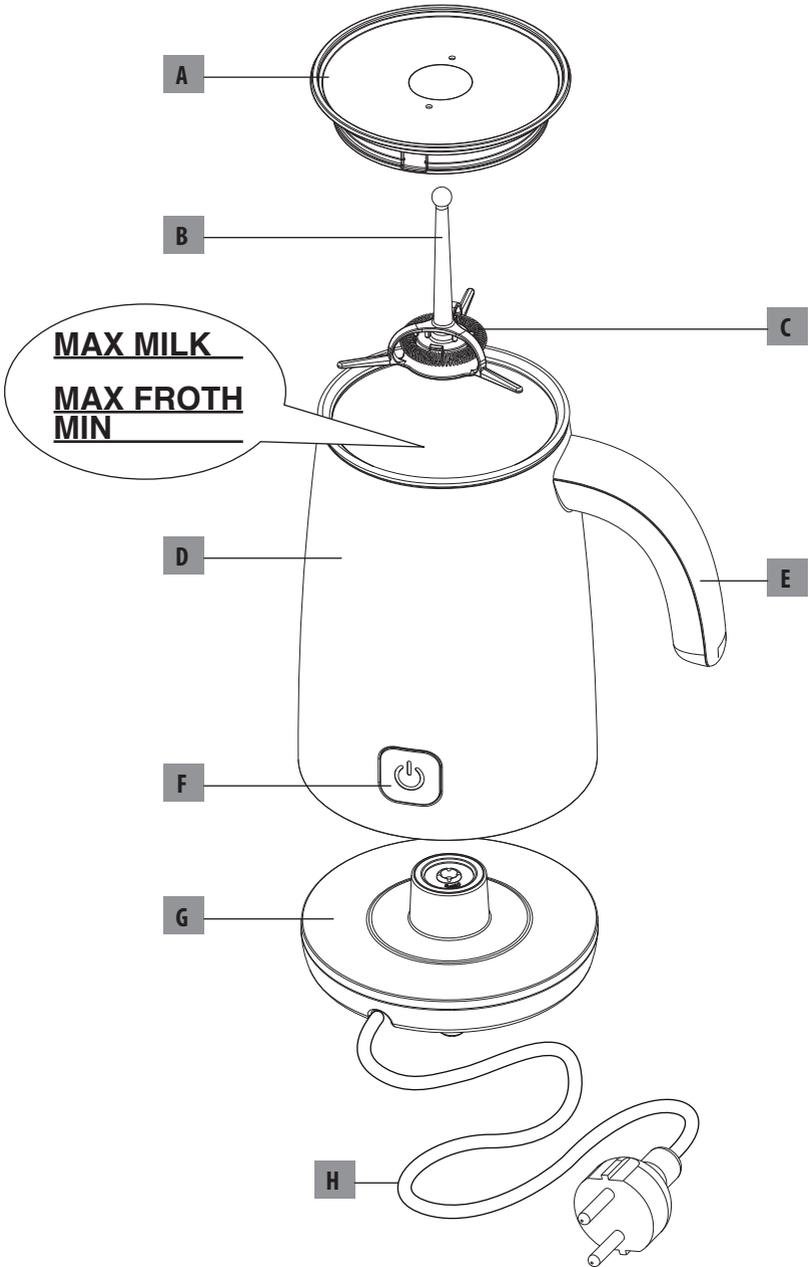

# USE

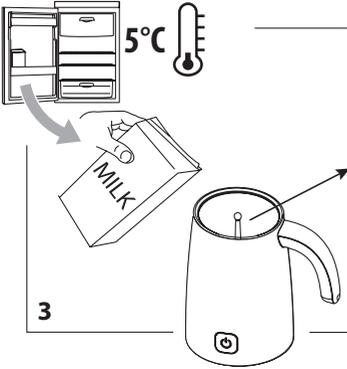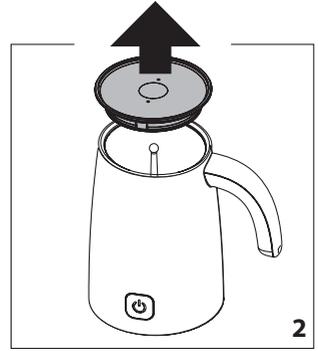

# CLEANING

Pulizia  
Nettoyage  
Reinigung  
Reinigung  
Limpeza  
Limpeza  
Καθάρισμα

