

FUNDAMENTAL SAFETY WARNINGS

- The appliance is not intended for use by persons (including children) with reduced physical, sensory or mental capabilities, or lack of experience and knowledge, unless they have been given supervision or instruction concerning use of the appliance by a person responsible for their safety.
- Children should be supervised to ensure that they do not play with the appliance.
- Cleaning and user maintenance shall not be made by children without supervision.
- Never clean by immersing the appliance in water.
- This is an household appliance only.
It is not intended to be used in: staff kitchen areas in shops, offices and other working environments; farm houses; by clients in hotels, motels and other residential type environments; bed and breakfast type environments.
- If the plug or cord is damaged, it must be replaced by Customer Services only to avoid all risk.

FOR EUROPEAN MARKETS ONLY:

- This appliance can be used by children aged from 8 years and above if they have been given supervision or instruction concerning use of the appliance in a safe way and understand the hazards involved.
Cleaning and user maintenance shall not be made by children unless they are older than 8 and supervised.
- Keep the appliance and power cord away from children under eight years of age.
- Appliances can be used by persons with reduced physical, sensory or mental capabilities or lack of experience and knowledge if they are supervised or have been given instruction concerning use of the appliance in a safe way and if they understand the hazards involved.
- Children shall not play with the appliance.
- Always unplug the appliance when left unattended and before assembly, taking apart or cleaning.



Surfaces marked with this symbol become hot during use (the symbol is present in certain models only).

SAFETY WARNINGS



Danger! Failure to observe the warning may result in life threatening injury by electric shock.

This is an electrical appliance and may cause electrical shocks. You should therefore follow these safety warnings:

- Never touch the appliance with damp hands or feet.
- Never touch the plug with damp hands.
- Make sure the socket used is freely accessible at all times, enabling the appliance to be unplugged when necessary.
- Unplug directly from the plug only. Never pull the cord as you could damage it.
- To disconnect the appliance completely you must unplug it from the mains socket.
- If the appliance is faulty, do not attempt to repair. Turn it off, unplug from the mains socket and contact Customer Services.
- Before cleaning the appliance, turn it off, unplug from the mains socket and allow to cool.



Important: Failure to observe the warning could result in injury or damage to the appliance.

Keep all packaging (plastic bags, polystyrene foam) away from children.



Danger of burns! Failure to observe the warning could result in scalds or burns.

This appliance produces hot water and steam may form while it is in operation.

Avoid contact with splashes of water or hot steam.

Designated use

This appliance is designed and made to prepare coffee and heat drinks.

Any other use is considered improper and thus dangerous.

The manufacturer is not liable for damage deriving from improper use of the appliance.

Instruction for Use

Read this Instruction for Use carefully before using the appliance. Failure to follow this Instruction for Use may result in burns or damage to the appliance.

The manufacturer is not liable for damage deriving from failure to respect this Instruction for Use.



Please note:

Keep this Instruction for Use.

If the appliance is passed to other persons, they must also be provided with this Instruction for Use.

Checking the appliance

After removing the packaging, make sure the product is complete and undamaged and that all accessories are present.

Do not use the appliance if it is visibly damaged.

Contact De'Longhi Customer Services.

Description of appliance

(page 3 - A)

- A1. Cup holder/Warming plate
- A2. Water spout/milk container coupling
- A3. General ON/OFF switch
- A4. Power supply cable socket
- A5. Boiler outlet/Infusion assembly
- A6. Water tank seat
- A7. Water tank lid
- A8. Water tank with seat for water filter
- A9. Water refill indicator
- A10. Drip tray
- A11. Indicator for drip tray maximum water level
- A12. Cup tray
- A13. Sliding tray for long coffee/latte macchiato glass
- A14. Cup warmer button

Description of control panel (B)

(page 3 - B)

- B1. ON/Stand-by Button
 - B2. ON/Stand-by Light
 - B3. 1 cup button
 - B4. 1 cup /"temperature OK" light
 - B5. 2 cups button
 - B6. 2 cups/"temperature OK" light
 - B7. Hot water button
 - B8. Hot water light
 - B9. Hot milk/cappuccino button
 - B10. Hot milk/cappuccino/"temperature OK" light
 - B11. Hot milk/latte macchiato button
 - B12. Hot milk/latte macchiato/"temperature OK" light
- See "Functioning light" for further informations.

Milk container description

(page 2 - C)

- C1. Milk frother lid with froth regulator
- C2. CLEAN button
- C3. Milk tube
- C4. Milk intake tube
- C5. Milk container

Description of accessories

(page 2 - D)

- D1. Filter-holder cup
- D2. 1 coffee crema filter
- D3. 2 coffee crema filter
- D4. ESE pod crema filter
- D5. Power supply cable (removable)
- D6. Tamper/dispenser measure
- D7. Removable water spout
- D8. Reactive strip to detect water hardness (Total hardness test)
- D9. Descaler
- D10. Water softener filter

Installing the appliance



Attention!

The following safety measures must be complied with when installing the appliance:

- The appliance could be damaged by water infiltration. Do not position the appliance near to water taps or sinks.
- The appliance could be damaged if the water it contains freezes.

Do not install the appliance in a room where the temperature can fall below freezing point.

- Position the power supply cable in a way that it cannot be damaged by sharp edges or by contact with hot surfaces (e.g. electric plates).

Connecting the appliance



Attention!

Make sure that the electric mains voltage corresponds with that indicated on the data plate on the base of the appliance.

Insert the power supply cable connector in the socket on the back of the appliance (fig. 1); then insert the plug in the power outlet.

Check that the mains power supply voltage corresponds to the value indicated on the rating plate on the bottom of the appliance.

If the power socket does not match the plug on the appliance, have the socket replaced with a suitable type by a qualified professional.

Activation of the water filter and filling of the water tank

- Remove the filter from the packaging and rinse it with about 0.5 l of running water (fig. 2).
- Turn the calendar disc (see fig. 3) until the following 2 months of use are displayed.



Please note

the filter has a two month duration if the appliance is used normally, whereas if the machine remains unused with the filter installed, it has a maximum 3 month duration.

- Remove the water tank and fill it with fresh water (do not exceed the MAX line) (fig. 4).
- Completely dip the filter in the water, tilting it to enable air bubbles to come out (fig. 5).
- Insert the filter in the appropriate seat (fig. 6), press down and close the tank with the lid.
- Place the tank back into the machine (Ensure the water level is not over the MAX line) (fig. 7).

The filter is now activated and the machine can be used.

Appliance first use

- Turn the appliance on by pressing the I/O main switch at rear in pos. I: the appliance performs a self-test, signalled by the sequential flashing of the lights.
- Once the self-test is completed, the "hot water spout" light B8 flashes while the others turn-off: the appliance signals it is necessary to insert the hot water spout (fig. 8).
- Place a container underneath the spout with minimum capacity of 100 ml (fig. 9).
- Press the "hot water" button : delivery starts and interrupts automatically.
- The coffee and water spout lights flash to indicate the appliance is reaching temperature: when the lights stop flashing and remain permanently on, the appliance is ready for use.



Please note: upon first use

- If lights and flash, press the button again.
- Upon first use, it is necessary to make 4-5 coffees or 4-5 cappuccinos before the machine gives a satisfying result.

Settings of the programming menu

To access the menu, ensure the appliance is in stand-by, simultaneously press buttons and until the ON/Standby (B2) light flashes: the appliance is in programming mode. Set the machine as wanted; to exit the programming menu, press button again.

Setting the temperature


If wanting to modify the water temperature with which coffee is delivered, proceed as follows:

1. Access the programming menu;
2. Keep button pressed until the lights relative to the wanted temperature turn-on:

Low temperature:  


Medium temperature:  

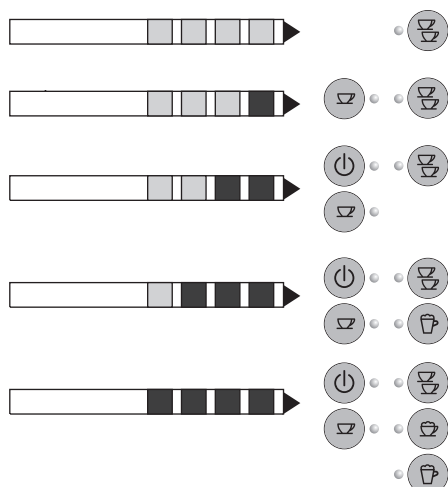
High temperature:  

- When the lights relative to the wanted selection turn-on, release the button.
- Press  to turn the appliance off (stand-by).

Set the water hardness

The lights signalling the need to descale the appliance, after a pre-set period of operation that depends on the hardness of the water. It is possible to program the machine according to the actual water hardness in use in the area, thus making descaling less frequent. Proceed as follows:

- Remove the provided reactive strip "TOTAL HARDNESS TEST" from its packaging.
- Completely dip the strip into a glass of water for one second.
- Remove the strip from the water and shake it slightly. After about one minute 1, 2, 3 or 4 red squares form, depending on the hardness of the water (4 red squares = very hard water).
- Access the programming menu.
- Once obtained the result of the strip, keep the "hot water"  button pressed until the lights turn-on, as in following table:



- When the lights relative to the detected water hardness turn-on, release the button.

- Press  button to turn the appliance off (stand-by).

Please note:

If the water filter is correctly used, set the machine on to a lower hardness level compared to that detected by the reactive strip.


ON/OFF and stand-by

When the main switch is in pos. I, turn the appliance on and off (stand-by) by pressing the .

The appliance automatically turns off (stand-by) after 75 minutes of non-use: to change the non-use time, refer to previous paragraph.

Adjust Stand-by

The machine is pre-set to switch to stand-by after 75 minutes of non-use. This time interval can be modified so that the appliance switches off after 15 minutes or after 3 hours. Proceed as follows:

- Access the programming menu;
- Keep the  button pressed until the lights relative to the desired standby interval turn-on:

15 minutes:




75 minutes:





3 hours:







- When the lights relative to the wanted selection turn-on, release the button.
- Press  to turn the appliance off (stand-by).

How to prepare espresso using ground coffee

- Insert the filter for ground coffee (D2 or D3) in the filter-holder (fig. 10). Use the filter  if wanting to make one coffee or the filter  if wanting to make 2 coffees.
- To prepare one coffee, fill the filter with a level measuring spoon of ground coffee, about 7gr (fig. 11). If you wish to prepare two cups of coffee, fill the filter with two less-than-level measuring spoons of ground coffee (about 7+7 gr). Fill the filter with small amounts at a time to prevent the coffee spilling out.

Attention:

For correct use, before filling the filter with ground coffee always make sure there is no residual coffee from the previous infusion in the filter.

- Distribute the ground coffee evenly and press it lightly using the coffee tamper (fig. 12).
Pressing the ground coffee is very important to obtain a good espresso. If excessively pressed, the coffee will slowly leak and it will be stronger. Whereas, if slightly pressed, the coffee will come out too quickly and will be light.
- Remove any excess coffee from the rim of the filter-holder and attach it to the machine: for correct attachment, align the filter-holder handle to symbol  OPEN (fig. 13), attach the filter-holder and turn grip to the right, until aligned to position  CLOSE (fig. 14).
- Position the cup or cups under the filter-holder spouts (fig. 15). It is advised to heat the cups before making the coffee, rinsing them with hot water.
- Ensure the lights relative to the coffee buttons are on, press the coffee buttons ( or ): the appliance proceeds and interrupts automatically.





How to prepare espresso using pods

Please note:

use pods that comply with the ESE Standard: this will be indicated on the packaging by the following mark.



The ESE Standard is a system accepted by leading coffee pod manufacturers and allows espresso coffee to be made simply and without mess.

- Insert the filter for pods coffee (D4 ) in the filter-holder (fig. 10).
- Insert the pod, centring it as far as possible on the filter (fig. 16). Always follow the instructions of the pod pack for correct positioning of the pod in the filter.
- Attach the filter-holder to the machine: for correct attachment, align the filter-holder handle to symbol  OPEN (fig. 13), attach the filter-holder and turn grip to the right, until aligned to position  CLOSE (fig. 14).
- Position the cup under the filter-holder spouts. It is advised to heat the cup before making the coffee, rinsing it with hot water.
- Ensure the lights relative to the coffee buttons are on, press the coffee button (): the appliance proceeds and interrupts automatically.

Please note:

- While the machine is preparing the coffee, the can be stopped at any time by pressing the previously pressed coffee button.

- Once delivery is completed, if wanting to increase the amount of coffee inside the cup, keep the previously pressed coffee button pressed (within 3 seconds) of delivery.
- Turn the grip from right to left to release the filter-holder.





Scalding hazard!

To avoid sprays, never release the filter-holder while the machine is delivering and wait a few seconds after delivery.

Program the amount of coffee in the cup

The machine has been set by default to deliver standard amounts. If wanting to amend these quantities, proceed as follows:

1. Place a cup under the coffee spout.
2. Keep the button to be programmed ( or ) pressed. The machine starts delivering coffee.
3. As soon as the wanted amount of coffee in cup is reached, release the button: delivery stops.

The machine is now re-programmed according to the new amount.

Warmer cup (fig. 32)

The warmer cup can be switched on by pushing the  button: leave the cups on the appliance as long as they are warm. This is useful to have warmer coffee.

How to prepare milk-based drinks

To avoid obtaining insufficiently frothed milk, or with large bubbles, always clean the lid of the milk and the hot water nozzle as described in the “cleaning the milk container” at page 24.

1. Remove the lid (fig. 17);
2. Fill the milk container with sufficient amount of milk, not exceeding the maximum of 0.5 l (fig. 18). Remember that every notch on the side of the container corresponds to 100 ml of milk.



Please note!

- For a more dense and homogenous froth, use skimmed or partially skimmed milk at refrigerator temperature (about 5°C).
- 3. Ensure the milk intake tube is correctly inserted in appropriate seat envisioned at bottom of the milk container lid (fig. 19).
- 4. Place the lid on the milk container again.
- 5. Remove the hot water spout from the nozzle.
- 6. Attach by inserting the container to the nozzle (fig. 20).
- 7. Set-up the machine to make coffee (see par. “How to prepare espresso using ground coffee”).
- 8. Place the cup for cappuccino or the glass for Latte Macchiato under the coffee spout and arrange the milk spout (fig. 21). If using tall cups or glasses, reposition the cup-holder, as shown in fig. 22).

9. Vary the froth regulator depending on the amount of froth wanted and type of milk used (fig. 23).

To prepare the Cappuccino: press button .

To prepare the latte macchiato: press button .

9. After having delivered the frothed milk, the machine automatically prepares the coffee.





Please note!

- For a hotter cappuccino, it is advised to press the CLEAN button to heat the ducts of the milk frother device (see successive paragraph).
- To prepare the cappuccino or the latte macchiato, the appliance performs 2 deliveries: first the milk and subsequently the coffee. If wanting to interrupt the delivery in progress, press the previously pressed button.
- Once delivery is completed, if wanting to increase the amount of milk or coffee inside the cup, keep the button (within a few seconds) relative to the preparation in progress pressed.
- Do not leave the milk container out of the refrigerator for too long: the higher the milk temperature (5°C is ideal), the poorer is the quality of the froth

Cleaning the milk frother device using the CLEAN button

After every use of the milk functions, perform cleaning to eliminate the milk residues as follows:

1. Leave the milk container inserted in the machine (it is not necessary to empty the milk container);
2. Place a cup or other container under the frothed milk spout tube.
3. Keep the "CLEAN" button (fig. 24) pressed: lights  and  flash. When the lights stop flashing and the appliance goes back to ready for use, release the "CLEAN" button: the steam cleans the circuits inside the milk frother.

Program the amount of coffee and milk in the cup for cappuccino or milk

The machine has been set by default to deliver standard amounts. If wanting to amend these quantities, proceed as follows:

1. Place a cup under the spouts of the coffee spout and under the milk spout tube.
2. Press the button relative to the preparation with milk to be programmed and keep it pressed. After a few seconds, the machine starts delivering the milk.
3. As soon as the wanted amount of milk in cup is reached, release the button milk delivery stops.
4. Program the amount of coffee in cup as for the amount of milk.

5. Programming is confirmed by the lights flashing for 3 seconds.

The machine is now re-programmed according to the new amounts of milk and coffee.


Preparing the hot water and steam



Scalding hazard!

Do not leave the machine unattended when delivering hot water. The spout heats up during delivery therefore, only the black part must be held.

Delivering hot water

1. Check the hot water spout is correctly attached (fig. 8).
2. Place a cup under the spout (as near as possible to avoid sprays).
3. Press the  button (fig. 2): the relative light flashes and the appliance starts hot water delivery.
4. The machine automatically stops delivery.




Please note!

- To manually interrupt the hot water delivery, press  button again.


Programming the amount of water automatically delivered

If wanting to amend the set by default amount, proceed as follows:

1. Place a cup under the spout.
2. Keep the  button pressed.
3. When the hot water in the cup reaches the required level, release the button. Programming is confirmed by the lights flashing for three seconds.

The machine is now re-programmed according to the new amount.

Delivering steam

1. Check the hot water spout is correctly attached (fig. 8).
2. Fill a container with the liquid to be heated/frothed and immerse the water/steam spout into the liquid.
3. Press twice the  button (B7): the relative light flashes and the appliance starts steam delivery.
4. When the required temperature is obtained, interrupt steam delivery by pressing the button again. (You should not discharge steam for more than 3 minutes at a time).





Important!

Always stop steam delivery before extracting the container containing the liquid to avoid burns from splashes.

Cleaning the water spout after use

Always clean the spout after use to avoid the build-up of milk residues and prevent the spout from clogging.

1. Place a container under the cappuccino maker and press the  button to deliver a little water (fig. 3). Stop the flow of water by pressing the  button again.
2. Wait a few minutes for the cappuccino maker to cool down, then extract the hot water spout.
3. Check the hole is not blocked. If necessary, clean with a pin.
4. Wash all parts of the cappuccino maker thoroughly with a sponge and warm water.
5. Reinsert the water spout.

Cleaning



Attention!

- Do not use solvents, abrasive detergents or alcohol to clean the machine.
- Only the milk container (D) can be washed in the dishwasher. No other part of the appliance can be washed in the dishwasher.
- Do not use metal objects to remove coffee deposits or fouling as they might scratch the metal or plastic surfaces.

Cleaning the drip tray



Attention!

The drip tray is equipped with a floating water level indicator (red) (fig. 24). As soon as this indicator starts protruding from the cup tray, empty the tray and clean it, otherwise the water may overflow and damage the machine, and the surrounding work-top.

1. Remove the drip tray (fig. 25).
2. Remove the cup tray, dispose of the water (fig. 26) and clean the tray using a cloth: then re-assemble the drip tray.
3. Re-insert the drip tray.

Cleaning the coffee filters

Regularly clean the coffee filters rinsing them under running water.

Check that the holes are not blocked. If they are, clean them using a pin (fig. 27).

Cleaning the boiler outlet

Rinse the boiler outlet every 200 coffees delivered, by delivering 0.5l of water from the boiler outlet (place a cup under the spouts and then press the button to deliver a coffee without using coffee powder).

Cleaning the milk container

Clean the milk container after each milk preparation, as described below:

1. Extract the lid.
2. Remove the milk spout tube and the intake tube (fig. 28).
3. Remove the froth regulator by pulling it out (fig. 29).

4. Carefully clean all components using hot water and a mild detergent.

All components can be washed in the dishwasher by positioning them on the upper rack of the dishwasher.

Pay particular attention that milk residues do not remain inside the holes and in the groove on the narrow part of the froth regulator.





5. Also check that the intake tube and the spout tube are not obstructed by milk residues.
6. Re-assemble the cursor, the spout tube and the milk intake tube.
7. Place the lid on the milk container again.

Replacing the filter




After two months of duration (see calendar), or if the appliance is not used for 3 weeks, replace the filter as described in paragraph "Activation of the softener filter and filling of the tank".

Descaling

Descalc the machine when the light  flashes on the control panel. Proceed as follows:

1. Remove the water filter. Fill the tank with the descaling solution obtained by diluting the descaler with water on the basis of the indications given on the pack.
2. Insert the hot water spout (fig. 8).
3. Place one container under the boiler outlet and one under the hot water spout (fig. 29) and ensure the drip tray is empty and correctly inserted.
4. Simultaneously press the  and  buttons: light  turns on (if the hot water spout has not been inserted, the light flashes).
5. Press the  button. Descaling is signalled by the LED that alternate in sequence.

The descaling program automatically performs a series of deliveries from the boiler outlet and from the hot water spout at intervals, to remove the lime scale from inside the coffee machine.

6. Once the descaling solution is terminated, the light  turns on to indicate rinsing is necessary.
7. To eliminate the solution and lime scale residues, rinse the tank and fill it with fresh water (without descaler); empty the containers and place them under the boiler outlet and hot water spout.
8. Press the  button: rinsing starts and all LEDs flash in sequence.
9. Rinsing stops when the tank is empty: rinse and top-up the tank.
10. Light  turns on: press the relative button: delivery starts and interrupts automatically.

The appliance is now ready for use.

Repairs to the coffee machine relative to lime scale problems are not covered by the warranty if the descaling procedure described above is not performed on a regular basis.

Technical data

Mains voltage:	220-240V-50/60Hz
Absorbed power:	1450W
Sizes LxHxD:	305x275x320 mm
Thermoblock:	Stainless steel/Aluminium
Pressure:	15 bar
Water tank capacity:	1 L
Power supply cable length:	1.2 m
Weight:	7 kg



This appliance complies with European regulation no. 1935/2004 on food contact materials.





DISPOSAL



The appliance must not be disposed of with household waste, but taken to an authorised waste separation and recycling centre.


FUNCTIONING LIGHT

LIGHTS	OPERATION	MEANING OF LIGHTS
	Turn on from general ON/OFF switch, at the back of the appliance.	The appliance performs a self-test, signalled by the sequential flashing of lights.
	The appliance is on: no accessory is connected to coupling A2.	The appliance is heating up to make coffee: when the 1 or 2 cup lights stop flashing, the appliance has reached the ideal temperature to deliver coffee.
	The appliance is on: the hot water spout D7 is connected to coupling A2.	The appliance is heating up to make coffee or to deliver hot water: when the 1 or 2 cup lights and the hot water spout light stop flashing, the appliance has reached the ideal temperature to deliver coffee or hot water.

	<p>The appliance is on: the milk container C is connected to coupling A2.</p>	<p>The appliance is heating up to make coffee, cappuccino or latte macchiato: when the 1 or 2 cup lights, the cappuccino and latte macchiato lights stop flashing, the appliance has reached ideal temperature to deliver coffee or cappuccino or latte macchiato.</p>
	<p>The appliance has been unused for 75 minutes for the ON/STAND-BY button has been pressed.</p>	<p>The appliance is in STAND-BY: to switch it back on, press the  button. The time interval before stand-by is adjustable: see section “Adjust Stand-by”</p>
	<p>The tank is empty or the appliance cannot deliver.</p>	<p>See section “Troubleshooting”</p>

TROUBLESHOOTING

Problem	Possible causes	Solution
The device will not switch on	The power supply cable is not inserted correctly	Check that the power supply cable connector is fully inserted in the appropriate socket on the back of the device; then check that the plug is correctly connected to the power outlet
Espresso coffee does not flow out	No water in the tank	Fill the water tank
	The holes in the filter-holder are blocked	Clean the holes in the filter-holder spouts
	The espresso boiler outlet is blocked	Clean as indicated in the “Cleaning” paragraph
Espresso coffee drips from the edges of the filter-holder instead of through the holes	The filter-holder is not correctly inserted or is dirty	Attach the filter-holder correctly and turn it fully home firmly
	The espresso boiler gasket has lost elasticity or it is dirty	Replace the espresso boiler gasket at an After-Sales Centre
	The holes in the filter-holder spout are blocked	Clean the holes in the spouts.
The filter-holder does not hook onto the device	Too much coffee was poured in the filter	Use the measure provided and make sure to use the correct filter for the type of preparation desired.
Loud pump noise	The water tank is empty	Fill the tank
	The tank is inserted incorrectly and the valve on the bottom is not open	Press the tank lightly to open the valve on the bottom
The coffee cream is clear (it flows quickly from the spout)	The ground coffee has not been sufficiently pressed	Increase pressing of the ground coffee
	Not enough ground coffee	Increase the amount of ground coffee
	The coffee is not ground finely enough	Only use coffee ground specifically for espresso coffee machines
	Incorrect type of ground coffee	Change the quality of the ground coffee

After coffee delivery, the filter remains attached to the boiler outlet		Insert the filter-holder again, then remove it.
After the coffee has been prepared, the pod or coffee powder remains attached to the boiler outlet		Re-insert the filter-holder, deliver coffee, remove the filter-holder.
The coffee cream is dark (it flows slowly from the spout)	The ground coffee is too tightly pressed	Press the coffee less
	Large amount of ground coffee	Decrease the amount of ground coffee
	The espresso boiler outlet is blocked	Perform cleaning as indicated in par. "Cleaning the boiler outlet"
	The filter is blocked	Perform cleaning as indicated in par. "Cleaning"
	The coffee is too finely ground	Only use coffee ground specifically for espresso coffee machines
	The ground coffee is too fine or is damp	Only use coffee ground specifically for espresso coffee machines and it must not be too damp
	Incorrect type of ground coffee	Change the quality of the ground coffee powder
The milk does not froth when making a cappuccino	The milk is not cold enough	Always use milk at refrigerator temperature
	The cursor of the milk frother lid is not in correct position	Ensure to have positioned the cursor in froth position
	The milk container lid is dirty	Clean the milk lid as described in par. "Cleaning the milk container"
The machine does not deliver any drink and the lights  and  flash for a few seconds.	No water in the tank	Fill the water tank
	The tank is inserted incorrectly and the valve on the bottom is not open	Press the tank lightly to open the valve on the bottom
	Incorrectly installed water filter	Activate the filter by following the indicated procedure
	The ground coffee is too tightly pressed	Press the coffee less
	The espresso boiler outlet is blocked	Perform cleaning as indicated in par. "Cleaning the milk container"
	The filter is blocked	Perform cleaning as indicated in par. "Cleaning"
The machine does not work and all lights flash		Immediately disconnect the appliance and contact an authorised after-sales assistance centre