

Important safeguard

- Use this appliance only as described in this instruction manual.

As with any electrical appliance, the instructions aim to cover as many situations as possible. Caution and common sense should be used when operating and installing this air conditioner.

- This appliance has been manufactured to cool and dehumidify domestic environments and must not be used for other purposes.
- It is dangerous to alter or modify the unit's characteristics in any way.
- The appliance must be installed in accordance with the relevant national legislation.
- Should repairs be necessary, contact our toll free customer service at **1-800-322-3848**. Unauthorized servicing can be dangerous.
- The appliance is not intended for use by persons (including children) with reduced physical, sensory or mental capabilities, or lack of experience and knowledge, unless they have been given supervision or instruction concerning use of the appliance by a person responsible for their safety.

Children should be supervised to ensure that they do not play with the appliance.

- If the power cable is damaged, it must be replaced by the manufacturer or an authorized technical service centre in order to avoid all risk.
- Always ensure the appliance is plugged into a grounded 3-prong outlet. If you have any doubts check with a qualified electrician.
- Do not use extension cables.
- Before cleaning or maintenance operations, always unplug the unit from the outlet.
- Do not pull on or place strain on the power cord when moving the appliance.
- The appliance should not be installed where the atmosphere may contain combustible gases, oil or sulphur, or near heat sources.
- Do not rest hot or heavy objects on the appliance.
- Clean the filters at least once a week.

- Avoid using heaters near the unit.
- The unit should be transported in a vertical position. If this is not possible secure the unit at an angle, do not lie it horizontally.
- Before transporting the unit, drain the unit. After transportation, wait at least 6 hours before switching the unit on.
- The packaging materials can be recycled. You are therefore recommended to place them in the special containers for differentiated waste collection.
- This appliance is fitted with a special safety device. When the compressor switches off, this device prevents it from switching on again for at least 3 minutes.
- **WARNING:** Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Specific warnings for appliances with R410A refrigerant gas

R410A is a refrigerant that complies with European ecological standards; nevertheless, it is recommended not to pierce the cooling circuit of the machine. At the end of its useful life, deliver the appliance to a special waste collection centre for disposal.

This hermetically sealed system contains fluorinated greenhouse gases.

ENVIRONMENTAL INFORMATION:

This unit contains fluorinated greenhouse gases covered by the Kyoto Protocol.

Maintenance and disposal must be carried out by qualified personnel only (R410A, GWP=2088).

Save these instructions

This product is for household only

INTRODUCTION

Thank you for choosing a De'Longhi product. Please take a few moments to read the instructions to avoid risks or damage to the appliance.

DESCRIPTION

Description of the appliance (See page 3 - A)

- A1** Air outlet grid
- A2** Control panel
- A3** Handles
- A4** Wheels
- A5** Remote control signal receiver
- A6** Remote control storage
- A7** Filter
- A8** Air intake grille
- A9** Air exhaust hose housing
- A10** Air intake grille
- A11** Drainage hose with cap
- A12** Power supply cable

Description of accessories (See page 3 - B)

- B1** Wall flange with cap
- B2** Window outlet vent
- B3** Hose adapter to wall flange/window outlet vent
- B4** Air exhaust hose
- B5** Hose adapter to unit
- B6** Window bracket with locking pin
- B7** Additional window bracket with locking pin
- B8** Water drain hose with cap
- B9** Remote control
- B10** End of season dust cover (on some models only)
- B11** End of season accessories bag (on some models only)
- B12** Foam stripping

Electrical connection

Before plugging the appliance into the outlet, check that:

- The outlet's power supply corresponds to the value indicated on the rating label on the back of the appliance;
- The outlet and electrical circuit are adequate for the appliance;
- The outlet is a 3-hole grounded outlet (⏏). If this is not the case, you must choose another outlet. Failure to follow these important safety instructions absolves the manufacturer of all liability.

If it becomes necessary, the power cable must be replaced by a qualified professional only.

The instructions below will enable you to prepare your air conditioner for operation as efficiently as possible. Before use, make sure the air intake and outlet grilles are unobstructed.


USE

Note: This appliance features an auto evaporative function to remove excess condensate water during cooling and dehumidifying modes.


AIR CONDITIONING WITH WALL INSTALLATION

For optimal results set-up your appliance in this way:

- Screw the hose adaptor **B3** and **B5** to the hose's end **B4** as shown in figure 1a.
- Fit the assembled air exhaust hose adapter **B5** in the housing at the back of the appliance. Align the open lock symbol on the adapter (B5) with the arrow on the back of the unit. Turn adapter counter clockwise until the closed lock symbol is aligned with the arrow, as shown in figure 1b.

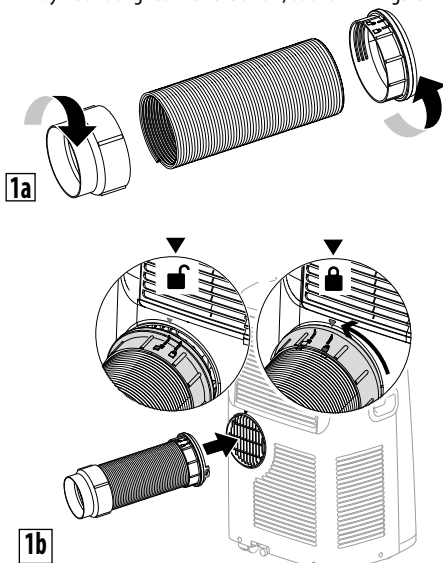

- Respect the distances given in figure 2.

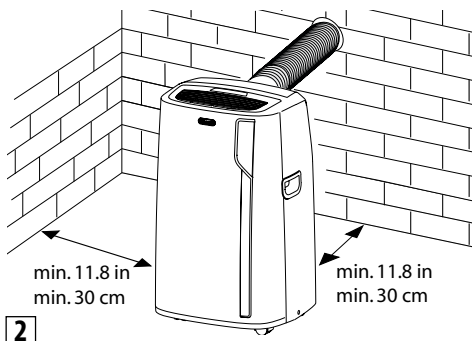


Proceed as follows:

- Drill a hole $\varnothing 5,25$ inches (134 mm) in an outside wall or through a wooden kickboard. Respect the dimensions and height of the hole given in figure 3 and 4.

3




in the wooden
kickboard of a French
window or panel



in the wall:
you are
recommended to insulate the
section of wall using
suitable insulation

- Fit the wall flange **B1** into the hole.
- Fit the assembled hose **B4** into the wall flange **B1** as shown in fig. 4.
- When the hose **B4** is not connected, the drilled hole can be closed with the flange cap **B1**.

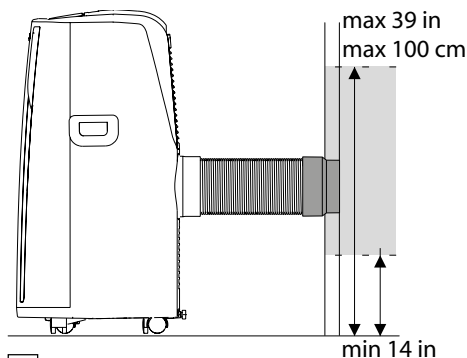

4

- When installing the air conditioner, you should leave a door slightly open little as $1/2''$ (1 cm) to guarantee correct ventilation and room pressure.
- Keep the air hoses as short and free of curves as possible to avoid constrictions.

Note:

- As special tools are required for this type of installation, we suggest you have the appliance installed by specialized personnel.

AIR CONDITIONING WITH WINDOW INSTALLATION

You can also set-up in a double-hung window:

- Place the window bracket in the window sill, extend the bracket fully within the window frame, fix the bracket in place using the locking pin. Attach the provided foam stripping (B12) to the top of the window bracket and then lower the window onto the bracket. (Should the window bracket be too large for the window, the plastic can be cut with a saw by a qualified professional.)
- Fit the air exhaust hose **B4** in the relevant housing located on the rear side of the appliance using hose adapter (B5). Align the open lock symbol on the adapter (B5) with the arrow on the back of the unit. Turn adapter counter clockwise until the closed lock symbol is aligned with the arrow, as shown in figure 1b.
- Connect the window outlet vent **B2** to the other end of the exhaust hose using hose adapter **B3**.
- Insert the window outlet vent **B2** of the exhaust hose into the slot of the window bracket (fig. 5).



5


Other set-up methods:

- Thanks to the locking pins, it's possible to use the window bracket also for sliding windows. Position the hole of the bracket so to allow a correct installation of the exhaust hose (see figure 6).



6

- If you have a casement window (figure 7) proceed as follows:
- Fit the assembled air exhaust hose **B4** in the relevant housing located on the rear side of the appliance, using hose adapter **B5**. Align the open lock symbol on the adapter **B5** with the arrow on the back of the unit. Turn adapter counter clockwise until the closed lock symbol is aligned with the arrow, as shown in figure 1b. Then, apply the window outlet **B2** to the air exhaust hose **B4** and place it outside the window to exhaust the hot air.

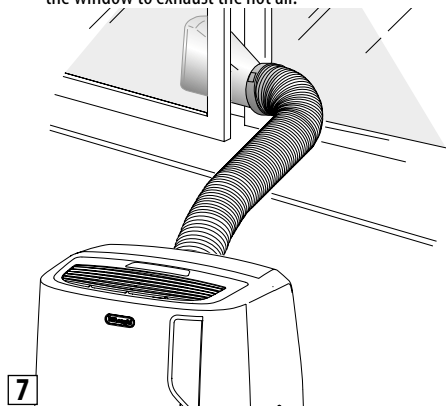


For help with installation, operation, and for all accessories and spare/replacement parts, please contact our toll free customer service call center at:

1-800-322-3848 [US only]

1-888-335-6644 [Canada only]

or log onto our website at **www.delonghi.com**

CONTROL PANEL

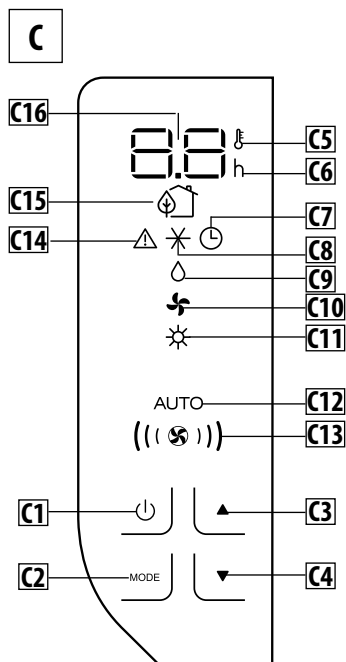


DESCRIPTION OF THE CONTROL PANEL (C)

- C1 ON/STAND-BY** (on/off) key
- C2** Function selection key **MODE** (air conditioning, dehumidifying, fan, heating, ECO REAL FEEL)
- C3** Increase key
- C4** Decrease key
- C5** Temperature indicator
- C6** Timer indicator
- C7** Timer symbol
- C8** Air conditioning symbol
- C9** Dehumidifying symbol
- C10** Fan symbol
- C11** Heating symbol (on some models only)
- C12** Auto indicator
- C13** Air flow indicator
- C14** Alarm symbol
- C15** ECO REAL FEEL symbol
- C16** Set temperature values, programmed on/off time

OPERATING FROM THE CONTROL PANEL


TURNING THE APPLIANCE ON/OFF

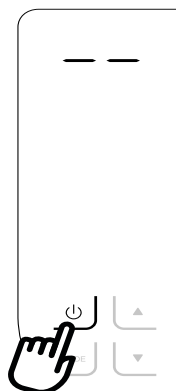

Before plugging the appliance check the cap on back of the unit are correctly inserted on drainage hose A11.

Insert the plug in the socket.

Two dashes appear on the display indicating that the appliance is in stand-by.


Touch the  (C1) key to turn on the appliance.

When the appliance comes on, the last function set before it was shut off is activated.

NOTE: After few seconds of the control panel inactivity, its brightness will be

automatically reduced and in the next few minutes it will be further reduced.

To turn the appliance off, touch the  key.


Note: Never turn off the air conditioner by simply pulling the plug. Touch the  key in order to put your air conditioner in stand-by and wait a few minutes before pulling the plug. In this manner, the appliance can perform the operating status checks.



MODES SELECTION



To select the desired operating mode, touch repeatedly the **MODE** key until the desired function is selected.

* AIR CONDITIONING MODE



This is ideal for hot and humid weather when the room needs to be both cooled and dehumidified.


To correctly set this mode:

- Touch repeatedly the **MODE** key until the air conditioning symbol appears. The display will show the desired temperature.
- To change the temperature to be reached, touch the  or  key.

Note: The most suitable temperatures, during the summer range from 75 to 81°F. However, setting the temperature significantly

lower than the outdoor temperature is not recommended. In conditioning mode, the air flow can be selected only from the remote control.


DEHUMIDIFYING MODE



This is ideal for reducing humidity in the room (spring and autumn, damp rooms, rainy periods, etc). For this type of use, the appliance must be set up as for air conditioner mode. That is, the air exhaust hose (**B4**) must be fitted to the appliance to allow the humidity to be discharged outside. To correctly set this mode:




- Touch repeatedly the **MODE** key until the dehumidifying symbol appears.
- The appliance automatically chooses the best air flow.

FAN MODE



When using this mode, the air exhaust hose (**B4**) does not need to be attached to the appliance.

To correctly set this mode:

- Touch repeatedly the **MODE** key until the fan  symbol appears.
- Select the desired air flow by touching the increase  (**C3**) or decrease  (**C4**) buttons.

The air flows available are:

()

Minimum air flow: when maximum silent operation is desired.


(())

Medium air flow: when the noise level needs to be low but with a good comfort level.

((()))



Maximum air flow: for maximum performance.

☀ HEATING MODE (on some models only)




This is ideal in spring and autumn when outdoor temperatures are not particularly severe. For this mode, the appliance should be prepared in the same way as for air conditioning, with the air exhaust hose (**B3**) attached.

To set this mode:

- Touch repeatedly the **MODE** button until the heating symbol is displayed.
- Touch increase  (**C3**) or decrease  (**C4**) buttons to adjust the desired temperature.


Notes:

- In this mode, the air flow is selected automatically by the appliance and cannot be set manually.
- When operating in very cold rooms, the appliance defreezes automatically, momentarily interrupting normal operation. In this case, "Lt" appears on the display. During this operation, it is normal for the noise made by the appliance to change.
- In this mode, you may have to wait a few minutes before the appliance starts giving out hot air.
- In this mode, the fan may operate for short periods, even though the set temperature has already been reached.
- It may happen that the display shows "HL" alarm. In this case, empty the internal safety tank following the instructions in the Section "End of Season operations". At the end, press again the  button to restore the heating function.




ECO REAL FEEL FUNCTION

(available only from remote control)



ECO REAL FEEL is the innovative De'Longhi technology that works simultaneously on temperature reduction and humidity control, securing best comfort level.

With traditional systems, during working time, optimal comfort conditions may be reached but not secured over time. With ECO REAL FEEL, once optimal comfort is reached, PAC automatically modulates compressor action and air flow, to keep it over time.

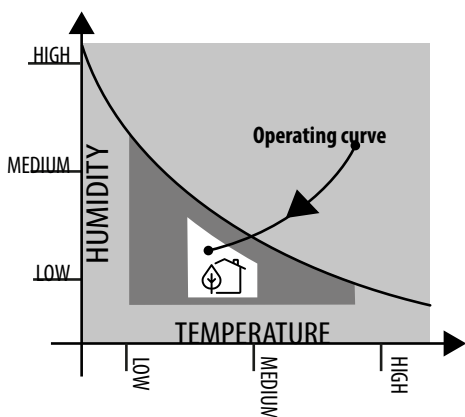

After approx. 1 minute, the ECO REAL FEEL symbol (C15) changes color when approaching the best comfort level (see following diagram).



ORANGE LIGHT: Room conditions far from optimal level.



GREEN LIGHT: Most people feel good room conditions, near optimal level.




Perfect!

BLUE LIGHT: Best comfort level.

- The well-being feeling is a subjective condition: for this reason, different people may judge differently the same environmental conditions.
- In particularly severe environmental conditions (large size of the environment, high temperature or humidity outside, poor insulation of the room, too many of people or strong heat load in the room, strong exposure to the sun ...) this device may not be able to reach the best comfort level.

SELECT THE TEMPERATURE SCALE

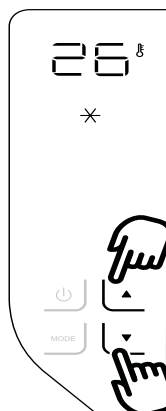

The temperature can be displayed in °C or °F.

To change the temperature unit of measure touch both the increase/decrease keys ▲ and ▼ for about 10 sec.

OPERATING FROM THE REMOTE CONTROL INSERTING OR REPLACING THE BATTERIES


- Remove the cover on the rear of the remote control;
- Insert or replace the batteries with two new R03 "AAA" 1.5V batteries, inserting them correctly (see the instructions inside the battery compartment);
- Replace the cover.

If the remote control unit is replaced or discarded, the batteries must be removed and disposed of in accordance with current legislation as they are harmful to the environment. Do not mix old and new batteries.

Do not mix alkaline, standard (carbon-zinc) or rechargeable (nickel-cadmium) batteries. Do not dispose of batteries in fire. Batteries may explode or leak. If the remote control is not be used for a certain length of time, remove the batteries.

USING THE REMOTE CONTROL


- Point the remote control at the receiver (A5) on the air conditioner. The remote control must be no more than 23 ft (7 metres) away from the appliance (without obstacles between the remote control and the receiver).
- The remote control must be handled with care. Do not drop it or expose it to direct sunlight or sources of heat.

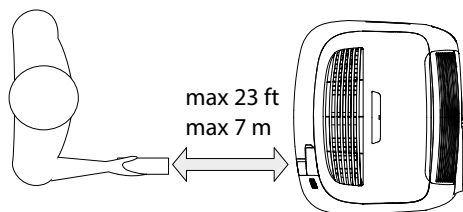



Note: The remote control can be safely stored in the appropriate compartment A6 (see figure page 3).


DESCRIPTION OF THE REMOTE CONTROL

- D1)** ON/STAND-BY button
- D2)** ECO REAL FEEL button
- D3.1)** Air flow increase/decrease button
- D3.2)** Temperature increase/decrease button
- D4)** Timer button
- D5)** **MODE** button

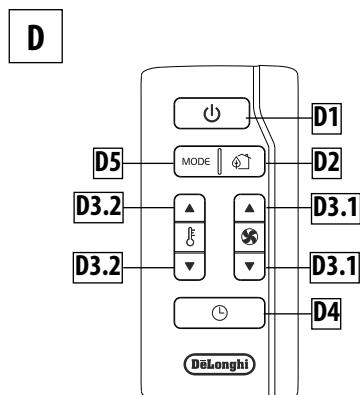

TURNING THE APPLIANCE ON/OFF

- Plug into the outlet.
- Press the  button (D1) (when turned on, the air conditioner starts operating in the same mode as when it was turned off).
- To switch the appliance off, press button (D1) .

Note: Never switch the appliance off by removing the plug. Always switch it off by pushing the  button and waiting few minutes before removing the plug. Only in this way the appliance will perform the standard checkings.

SELECTING THE OPERATING MODES

Most of the commands available on the remote control correspond to those on the appliance control panel (C).




SELECTING THE TEMPERATURES


In conditioning and heating modes press button **D3.2** to select the desired temperature.

SELECTING THE AIR FLOW

In conditioning and fan modes, press button **D3.1** to select the desired air flow.

The air flow available are:


- () **Minimum air flow:** when maximum silent operation is desired.
- (()) **Medium air flow:** when the noise level needs to be low but with a good comfort level.
- ((())) **Maximum air flow:** for maximum performance.

AUTO  The appliance automatically chooses the air flow based on the temperature selected and the environmental conditions (This is available only in the air conditioning mode).

ECO REAL FEEL FUNCTION

To activate this function, push button (D2) on the remote control. See description of the function on page 9.

SETTING THE TIMER



The timer allows for the delayed start up or shut down of the appliance. This function will prevent wasting electricity by optimising the operating periods.

How to program delayed shut down

- While the appliance is on in any operating mode, delayed shut down can be programmed.
- Press the timer button (D4): the timer symbol (C7) and hours (C6) light up.
- Press the timer key until the desired numbers of hours to shut down appears on the display (1,2,4,6,8,12 hours).

A few seconds after the timer is set, the setting is acquired, the display shows the operating mode and the timer symbol stays lit. Once the set time is elapsed, the air conditioner goes into standby. To cancel the timer program, press the timer button (D4) twice. The timer symbol (C7) will go off.

Note: Once the timer has been activated, by pressing the timer key only one time, the remaining hours to shut down will be displayed.

How to program delayed start up

- Plug in the appliance and set to standby.
- Press the timer button (D4): the timer symbol (C7) and hours (C6) light up.
- Press the timer key until the desired numbers of hours to start up appears (1,2,4,6,8,12 hours).

When the set time is elapsed, the appliance will start to operate in the same operating mode that was previously set.

To cancel the timer program, touch the timer button (D4) twice. The timer symbol (C7) will go off.

NOTE: Once the timer has been activated, by pressing the timer key only one time, the remaining hours to the start up will be displayed.

Notes:




- This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation.
- This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:
 - Reorient or relocate the receiving antenna.
 - Increase the separation between the equipment and receiver.
 - Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
 - Consult the dealer or an experienced radio/TV technician for help.

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

- This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.
- This Class B digital apparatus complies with Canadian ICES-003.

SELF-DIAGNOSIS


The appliance has a self diagnosis system to identify a number of warning/malfunctions. Error messages are displayed on the appliance display.

<div>IF ... IS DISPLAYED,</div> <div></div> <div>"Low Temperature" (frost prevention)</div> <div>..WHAT SHOULD I DO?</div> <div>The appliance is fitted with a frost protection device to avoid excessive formation of ice. The appliance starts up again automatically when the defrosting process is completed.</div>	<div>IF ... IS DISPLAYED,</div> <div></div> <div>Probe Failure (Probe damaged)</div> <div>..WHAT SHOULD I DO?</div> <div>If this is displayed, contact your local authorized service center.</div>	<div>IF ... IS DISPLAYED,</div> <div></div> <div>"High Level" (Internal tray full)</div> <div>..WHAT SHOULD I DO?</div> <div>Empty the internal safety tank following the instructions in the section "End of season operations".</div>
---	--	---

TIPS FOR CORRECT USE


To ensure optimal results from your air conditioner, follow these recommendations:

- close the windows and doors in the room to be air conditioned. When installing the air conditioner semi-permanently, you should leave a door slightly open (as little as 0.39 inch. (1 cm)) to guarantee proper ventilation.

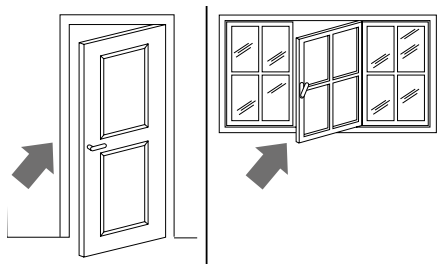


Close doors and windows

- Never use the appliance in very damp rooms (laundries for example).
- Protect the room from direct exposure to the sun by partially closing curtains and/or blinds to make the appliance much more economical to run.



Close blinds or curtains


- Never use the appliance outdoors.
- Make sure there are no heat sources in the room;
- make sure the air conditioner is standing on a level surface.



do not cover the appliance

- Never rest objects of any kind on the air conditioner;
- Never obstruct the air intake or outlet grilles;

CLEANING

Before cleaning or maintenance, turn the appliance off by touching the  button, then unplug from the outlet.

CLEANING THE CABINET

You should clean the appliance with a slightly damp cloth then dry with a dry cloth. For safety reasons, never wash the air conditioner with water.

Precautions

Never use petrol, alcohol or solvents to clean the appliance. Never spray insecticide liquids or similar.

CLEANING THE BIO SILVER AIR FILTER (If fitted)

If the filter is dirty, air circulation is compromised and the efficiency of the dehumidifying and air purifying functions decreases.

It is therefore good practice to clean the filter at regular intervals. The frequency depends on the duration and conditions of operation.


If the unit is used constantly or systematically, you are recommended to clean the filter once a week.

The filter is housed in the intake grille.

To clean the filter, extract as shown in fig. 8.

To maintain the efficiency of the air conditioner, it is recommended to clean the dust filter after every week of use.

The filter is located near the intake grille. Remove the grille to access the filter. To clean the filter, it will need to be extracted as shown in fig. 8.

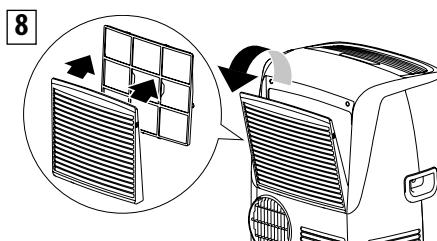

Use a vacuum cleaner to remove any dust deposited on the filter. If it is very dirty, submerge it into warm water and rinse it several times. The water temperature must be kept below 104° F (40°C). After washing the filter, allow it to dry completely before repositioning it.

The BioSilver filter helps capture dust and pollen and helps reduce the growth of bacteria and mold on the filter.

CHECKS AT THE START OF THE SEASON


Make sure the power cable and socket are in perfect condition and make sure the earthing system is efficient. Comply strictly with the installation standards.

END OF SEASON OPERATIONS

To drain all water from the circuit, remove the cap **A11** from the drainage on the back of the appliance and allow the water to drain out into a basin (fig. 10).

To facilitate this operation, at the start of the season, it's possible to apply the water drain hose with cap **B8**.

In order to properly storage the appliance at the end of the season, we suggest you cover it with the supplied end of season dust cover **B10** and you put the accessories in the relevant end of season accessories bag **B11**.

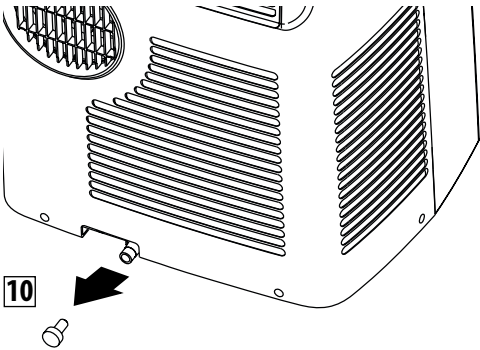

When the appliance is empty, replace the cap.
Clean the filter and dry thoroughly before putting back.

TECHNICAL SPECIFICATIONS

Power supply voltage	see rating label
Max. absorbed power during air conditioning	"
Refrigerant	"
Cooling capacity	"

LIMIT CONDITIONS

Room temperature for air conditioning	64 ÷ 95°F (18° ÷ 35°C)
Room temperature for heating (on some models only)	50 ÷ 77°F (10 ÷ 25°C)

Transport, filling, cleaning, recovery and disposal of refrigerant should be performed by a technical service centre appointed by the manufacturer only.
The appliance should be disposed of by a specialist centre appointed by the manufacturer only.

TO AVOID DAMAGE TO THE UNIT:

NEVER TRANSPORT OR TURN THE APPLIANCE UPSIDE DOWN OR ON ITS SIDE. IF THIS OCCURS, WAIT 6 HOURS BEFORE TURNING THE APPLIANCE ON, 24 HOURS IS RECOMMENDED. After the unit has been on its side, oil needs to return to the compressor to ensure proper function. Without allowing the unit this time (6-24 hours) the unit may function for only a short time, and then the compressor will break down from lack of oil.

ELECTRICAL CONNECTION

This appliance is equipped with a 3 prong grounded plug. The plug must be connected into an outlet that is properly installed and grounded in the accordance with all local codes and ordinances. Do not modify the plug provided with the appliance. If it will not fit the outlet, have a proper outlet installed by a qualified electrician or relocate the unit to a proper outlet. If the household electrical supply does not meet the above specifications, or if you are not sure your home has an effective electrical ground, have a qualified electrician or your local electrical utility company check it and correct any problems.

SAFETY PLUG


The appliance is fitted with a safety plug to protect the power cable. If power is cut off, unplug from the outlet and make sure the power cable is undamaged. If the cable is damaged, call the service center immediately. If power cuts off frequently and the power cable is undamaged, contact a qualified electrician.

OPERATION OF THE SAFETY PLUG

If the safety device incorporated in the plug trips and cuts off the power supply, check that the power cable and plug are not damaged. If the power cable is undamaged, to restore operation press the "RESET" button. To verify correct operation of the plug, press the "TEST" button periodically and make sure the appliance disconnects. If this is not the case, contact the service center. To restore operation, press the "RESET" button.

TROUBLESHOOTING

Check the following points before calling the authorised Technical Service Centre in your area.

PROBLEMS	CAUSES	SOLUTIONS
The air conditioner does not turn on	It is not plugged in	plug it in
	there is no power	wait
	the internal protection device was triggered	call the help centre
The air conditioner works for a short period of time	the air exhaust hose is obstructed or bent	correctly position the air exhaust hose, limiting the length and curves as much as possible and avoiding any obstructions
	an obstruction is impeding air exhaust outside	identify and remove the obstacles that impede air exhaust outside
The air conditioner runs but does not cool the room	windows, doors, drapes open	close the windows, doors and drapes, keeping in mind the "recommendations for proper use"
	there is some heat source in the room (oven, hair dryer, etc.)	eliminate the heat source
	the air exhaust hose is disconnected from the appliance	attach the air exhaust hose to the housing on the back of the appliance (fig.1)
	dust filters clogged	clean or replace the filters as previously described
	the technical characteristics of the appliance are not suitable for cooling the room where it is located	
During operation there is an unpleasant odour in the room	dust filters clogged	clean or replace the filters as previously described
The air conditioner does not work for about 3 minutes from restart	to protect the compressor there is an internal device that delays startup for about 3 minutes from restart	wait
The display shows the  symbol with one of the following messages: <i>HL/PF</i>	the appliance has a self-diagnosis system that identifies some operating errors	refer to the SELF-DIAGNOSIS chapter