

CATALYTIC HEATER

GB

RADIATEUR A COMBUSTION CATALYTIQUE

F

STUFA CATALITICA

I

ΚΑΤΑΛΥΤΙΚΗ ΘΕΡΜΑΣΤΡΑ

GR

ELECTRICAL CONNECTION (UK ONLY)

- A) If your appliance comes fitted with a plug, it will incorporate a 13 Amp fuse. If it does not fit your socket, the plug should be cut off from the mains lead, and an appropriate plug fitted, as below.

WARNING: Very carefully dispose of the cut off plug after removing the fuse: do not insert in a 13 Amp socket elsewhere in the house as this could cause a shock hazard.

With alternative plugs not incorporating a fuse, the circuit must be protected by a 15 Amp fuse.

If the plug is a moulded-on type, the fuse cover must be re-fitted when changing the fuse using a 13 Amp Asta approved fuse to BS 1362. In the event of losing the fuse cover, the plug must NOT be used until a replacement fuse cover can be obtained from your nearest electrical dealer. The colour of the correct replacement fuse cover is that as marked on the base of the plug.

- B) If your appliance is not fitted with a plug, please follow the instructions provided below:


WARNING - THIS APPLIANCE MUST BE EARTHED **IMPORTANT**

The wires in the mains lead are coloured in accordance with the following code:

Green and yellow:	Earth
Blue:	Neutral
Brown:	Live



As the colours of the wires in the mains lead may not correspond with the coloured markings identifying the terminals in your plug, proceed as follows:

The green and yellow wire must be connected to the terminal in the plug marked with the letter E or the earth symbol  or coloured green or green and yellow.

The blue wire must be connected to the terminal marked with the letter N or coloured black.

The brown wire must be connected to the terminal marked with the letter L or coloured red.

CATALYTIC HEATER


Technical Data

Type	Category	Maximum Input		Low Input		Gas pressure
see rating label		KW	g/h	KW	g/h	
		3.0	218	1.9	138	

This appliance is designed to operate with Butane, propane or mix LPG at nominal pressure: 28 ÷ 30 mbar. For a correct gas combustion the required air quantity is 6 m³/h.

WARNINGS

- ALWAYS use heater in accordance with instructions. Read the instructions book carefully and keep it in a safe place.
- This appliance requires a rubber tube and a pressure regulator in accordance with the law in force. If not supplied check with your gas supplier.
- Use ONLY in a well ventilated area.
- This appliance MUST NOT be used in basements, high rise flats, bathrooms or bedrooms and in rooms having volume less than 18,5m³ (37 m³ in living rooms).
- This appliance emits the combustion residues in the room in which is used.
- DO NOT place clothes or other materials on the heater, as apart from the danger of fire their presence could affect the efficient working of the appliance (fig. 1).

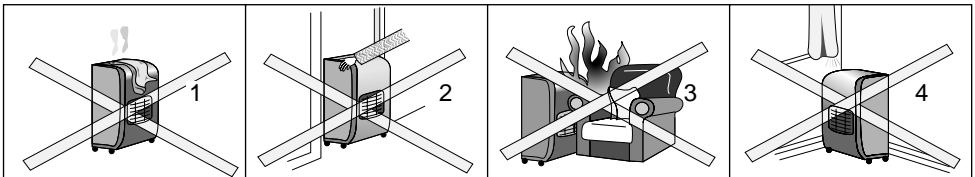

- DO NOT move heater from room to room when it is lit (fig. 2).
- DO NOT position heater alongside a wall or near curtains or arm-chairs etc. (fig. 3 - 4).
- ALWAYS face heater towards centre of room. Special care should be taken if the heater is on a surface where it can move or twist on its wheels or castors if knocked by a child or dog, etc.
- Minimum Clearance : 200 mm from sides, 1500 mm from front.
- Before using for the first time, turn on the appliance and leave to heat for at least 15 minutes with the thermostat on maximum to eliminate the smell of 'newness' and any fumes from the protective substances applied to the elements before transport. Air the room during this operation.

Safety devices

The heater you have purchased is fitted with safety devices which come on in the event of malfunctioning while the appliance is in use. If the pilot light (placed opposite the burner) accidentally goes out, or if the room is not sufficiently ventilated, the safety device will block the gas flow, causing the heater to go off.

Gas leakages

If a leak is suspected, turn off gas at the gas bottle, open the window and air the room. DO NOT disconnect the pressure regulator. Extinguish all naked lights. Slowly turn the gas on

and brush the connections with soapy water or liquid detergent - a gas leak will form bubbles. If a leak is found, turn the gas off and inform your Dealer. DO NOT use the heater again until it has been inspected by your Dealer.

NEVER USE MATCHES TO FIND LEAKS.

GENERAL SAFETY INSTRUCTIONS

Gas bottle

Gas Bottle with 15 kg of maximum capacity can be installed.
Changing of gas bottle must not be carried out in the presence of a naked flame.
Use the gas bottle always in upright position. If a screw on regulator is used ensure that the regulator washer is present and in good condition -replace if in any doubt.
To place the bottle in position, remove the rear panel which faces the inside during transport, by unfastening the screws; than put the bottle in position and replace the panel.
Do not turn the bottle upside down to use completely its content.

Pressure regulators, rubber tubes and clips

CHECK that tubing is completely over the nozzles at each end of the tubing and that it is held firmly in place by tube clips (See fig.5). Check the expiry date and state of the rubber tube regularly. If it is past its expiry date or has been damaged, replace it with one which complies to local standard. In any case replace the tube every 5 years.
When connecting the pressure regulator to the gas bottle avoid undue twisting of the flexible tubing.




fig. 5

A 28 ÷ 30 mbar (11.2 in w.g.) pressure regulator for Butane or Propane complying to local standard must be connected to the appliance with the above tubing, using suitable tube clips.

Ventilation

USE ONLY IN A WELL VENTILATED ROOM

Adequate ventilation must be provided in rooms in which the heater is used. This ensures removal of the products of combustion and allows the entry of replacement air.
The following table shows the smallest size of room suitable for each heat setting and the dimensions of the aperture which must be provided equally divided between high and low level, according with the maximum, medium or minimum power.

Room Size	Room Aperture
30 m ³	75 cm ²

Safety guard

The guard is to prevent risk of fire and no part of it should be permanently removed.
It does not give full protection for young children or the infirm.

OPERATING INSTRUCTIONS

Lighting the heater

1. Turn on the gas at the gas bottle tap.
2. Turn the thermostat fully counter-clockwise to the maximum position (No. 6).
Fully depress the button " 🔥 " for 15 seconds and consequently depress button " ⚡ " Two or three times. The pilot flame will ignite. (If pilot flame does not ignite return to starting position and repeat). Continue to fully depress the button " 🔥 " for a further 15 seconds to allow the thermocouple probe to heat up; then release the button. Leave control knob in the maximum position (No. 6) for 10 minutes. When the room temperature has reached the desired level; turn the thermostat clockwise until the reference mark " ▼ " is aligned with position "3-4". The thermostat will now automatically maintain the temperature at the desired level.

Auxiliary ignition

Should piezoelectric starter fail to work, repeat operation on control knob and use a match to light pilot flame.

Turning off the heater

Turn off the gas bottle tap.

The Heater will be totally "OFF" only if the tap at the gas bottle is turned off.

Important

When the operating button " 🔥 " is left at the end of the starting time (see also rating plate), this must move up about 5 mm and return to its starting height. If this does not happen, shut the gas valve and contact your aftersales service centre. Do not let the appliance work with the operating knob pressed downwards by force.

The ambient thermostat is the device which enables you to maintain the set temperature at a constant level. When the heater is on, turn the thermostat knob to maximum, at which point the three burners will come on. When the room has reached the required temperature, turn the thermostat knob in a clockwise direction until the side burners go off. In this way the appliance will automatically maintain the preset temperature oscillating between maximum power (3 burners on) and minimum power (1 burner on) and vice versa. Correct use of the thermostat function enables rooms to be heated efficiently at a reduced cost.

VENTILATED CATALYTIC HEATER

Electrical connection

- Before using the appliance check that your supply voltage is the same as that shown on the rating label of the unit.
- Connect your heater to earth provided socket only, having a capacity of at least 10/16 A.
- THIS APPLIANCE COMPLIES WITH THE EEC DIRECTIVE 89/336, relating to electromagnetic compatibility.

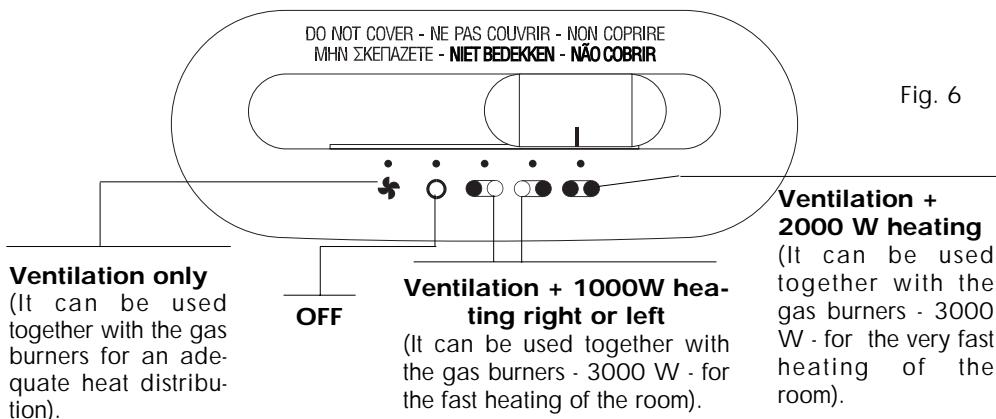


Fig. 6

OPERATION AND USE

Fully insert plug into socket-outlet and switch on the fan heater following the instructions of fig. 6
Before switching on the gas burner, read carefully the relevant operating instructions.

IMPORTANT

DO NOT cover the appliance when in operation, this could cause a dangerous rise of the temperature of the fan heater with consequent risk of fire.

Important notes

- Your heater must always be earthed: warranty does not cover damages caused by non-observance of this warning.
- Do not use your heater close to wash-basin, bath- tub, shower, swimming pool.
- Do not lay the cable on the hot unit.
- Use the appliance only standing on the floor.
- The heater must always operate in upright position.
- Do not cover either the hot air output or input grid on the top of the unit during service.
- Replacement of the power cable must be carried out by qualified personnel. Always use original spare parts supplied by the manufacturer.
- The heater must not be located immediately below a fixed socket outlet.
- **A safety device switches the fan heater off if it accidentally overheats. To reset the unit for normal operation, remove the plug from the mains socket for a few minutes, eliminate the cause of the overheating (e.g. air intake or outlet grilles obstructed) and then plug the fan heater back in again. Contact your nearest Technical Assistance Service if the fan heater does not start operating normally again.**
- Never direct the fan heater's air flow towards furniture, curtains, spray cans and inflammable material.
- Do not install the appliance in a room which might contain gas, oil or sulphur, or near sources of heat.
- Do not use the appliance in the mountains at high altitudes.

CAUTION: In order to avoid a hazard due to inadvertent resetting of the thermal cutout, this appliance must not be supplied through an external switching device, such as a timer, or connected to a circuit that is regularly switched on and off by the utility.

MAINTENANCE

Wipe your appliance with a soft damp cloth and only when it is switched off, cold and unplugged. Do not use solvents or abrasives detergents.

Check that there is no dust blocking the air inlet or outlet grids. Clean using a vacuum cleaner. When not in use remove plug from socket and store cable as shown in Fig. 7. When not in use the heater should be covered and stored in a dust-free place. Refer any major maintenance to your Local Authorised Dealer. Major servicing should be carried out every 2 - 3 years. If in doubt refer to your nearest authorised dealer.

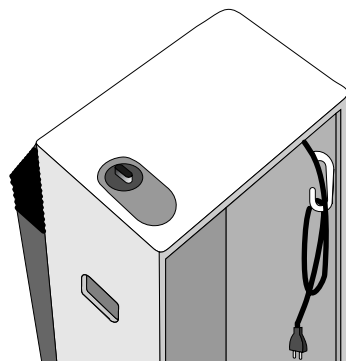


Fig. 7